


Data Sheet for Article: LI1008920-

DECONA 30 CL PHASE Ceiling Luminaire

3000/4000K 17W bl/go

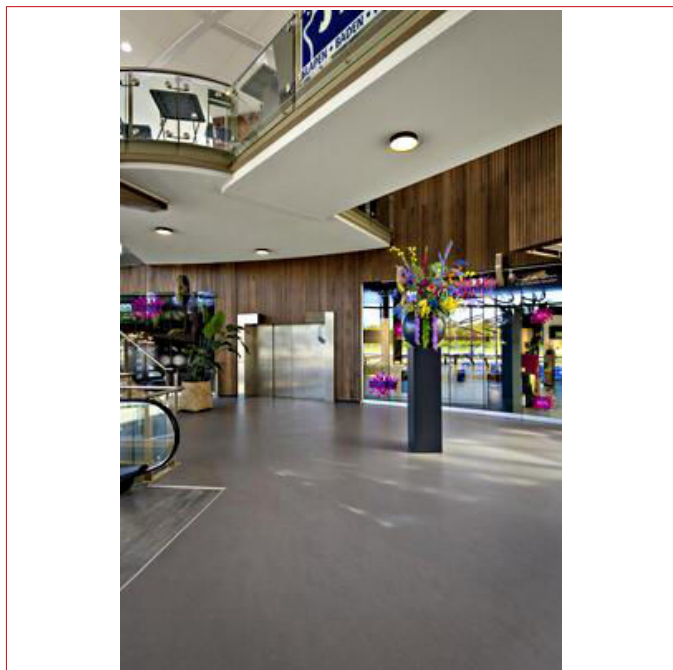

Technical Data

Net length (mm)	300,00
Net width (mm)	300,00
Net height (mm)	58,00
Net diameter (mm)	420,00
Net weight (kg)	1,32
Luminaire type	surface mounted ceiling luminaire
Colour	Black/gold
Material	Aluminum Polycarbonate
Glare factor (UGR)	25
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	98,82
Power (W)	17
Light colour	neutral white warm white
Colour temperature (K)	4000 3000

Technical Data - continued

Colour rendering index (Ra)	90
Luminous flux (lm)	1760 1680
Service life	50000
Dimmable	trailing edge dimmable (C)
Protection class	II
Shock strength	IK06
ØxH mm	420x58
LxWxH mm	300x300x58

DESCRIPTION	Order No.
DECONA 30 CL PHASE Ceiling Luminaire 3000/4000K 17W bl/go	LI1008920