


Data Sheet for Article: LI1009856-

NUMINOS® MOVE L, recessed CL 4000K, 20°, IP20, round, wh

recessed ceiling light

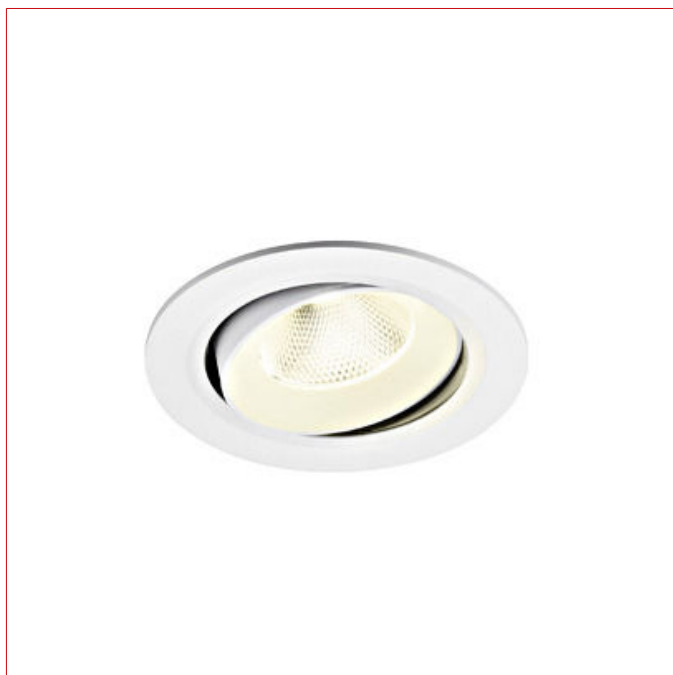

Technical Data

Net length (mm)	160,00
Net width (mm)	160,00
Net height (mm)	93,00
Net diameter (mm)	160,00
Net weight (kg)	0,51
Colour	White
Material	Aluminum
Beam angle (°)	20
Glare factor (UGR)	19
Power (W)	17
Colour temperature (K)	4000
Colour rendering index (Ra)	90
Luminous flux (lm)	2700
Service life	50000
Protection class	III
IP Rating	IP20
ØxH mm	160x93

Technical Data - continued

LxWxH mm

| 160x160x93

DESCRIPTION	Order No.
NUMINOS® MOVE L, recessed CL 4000K, 20°, IP20, round, wh recessed ceiling light	LI1009856