

Data Sheet for Article: LI111183--


PIKA MR16 downlight, MR16, max. 50W, brass



Technical Data

Manufacturer	03-SLV
Protection class	III
Luminaire type	Recessed ceiling luminaire
Light source	Low voltage halogen - reflector lamp
Number of lamps	1
Lamp holder	MR16
Power (W)	50
Operating voltage AC (V)	12
Operating voltage DC (V)	12
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø60
Mounting depth (mm)	85
Colour	Brass
Material	Aluminum
Diameter (mm)	80
Optional Accessories	LI1001570-, LI551243--, LI461067--
Cut-out size mm	Ø60

Energieeffizienzklasse: PIKA MR16 downlight, MR16, max. 50W, brass

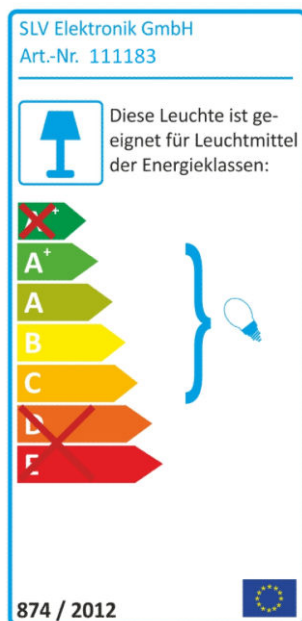

Article Table

DESCRIPTION	Order No.
PIKA MR16 downlight, MR16, max. 50W, brass	LI111183
Optional Accessories	
LED lamp, QPAR111, GU10, 7W, 3000K 25° silver	LI1001570
MR16 SMD LED, 4W, 3000K, 225lm, 40°	LI551243
Electronic transformer FN I, 12V, 60VA	LI461067