

Data Sheet for Article: LI114931--


CRYSTAL VIII downlight, G4, max. 20W, round, cristal



Technical Data

Cut-out size (mm)	Ø50
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	Crystal clear
Material	Crystal glass
Operating voltage AC (V)	12
Operating voltage DC (V)	12
Light source	Low voltage halogen lamps
Lamp holder	QT9
Socket	G4
Watt (W)	20
Number of lamps	1
Appliance class	III
Mounting depth (mm)	110
Diameter (mm)	97
ØxH mm	97x50
Cut-out size mm	Ø50

Dimensioned drawing: CRYSTAL VIII downlight, G4, max. 20W, round, cristal

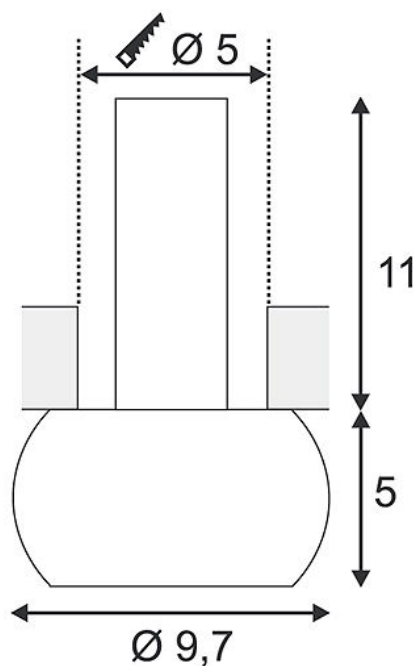

Article Table

DESCRIPTION	Order No.
CRYSTAL VIII downlight, G4, max. 20W, round, cristal	LI114931
Optional Accessories	
FN-LIGHT low-pressure pin socket G4, 12V, 20W, UV-Stop	LI512220
Mini transformer, 12V, 60VA	LI461060
Low-voltage coupler box, 6 outlets, 250W	LI410140