

Data Sheet for Article: LI115243--

COB LED MODULE, silver-grey, 30°, CRI65+


for AIXLIGHT PRO installation frame



Technical Data

Luminous flux (lm)	1300
Colour temperature (K)	3600
Colour rendering index (Ra)	≥65
Service life	30.000h
Dimmable	Depending on driver yes
Protection class	III
Illuminant incl.	yes
Operation current mA (mA)	700
Mounting	recessed mounting ceiling
Colour	Silver grey Black
Material	Aluminum Glass
Height (mm)	130
Diameter (mm)	135
Weight (kg)	0,516
Optional Accessories	LI1001267-, LI115170---, LI115600---, LI464032---, LI464168---, LI464174--
ØxH mm	135x130

Dimensioned drawing: COB LED MODULE, silver-grey, 30°, CRI65+

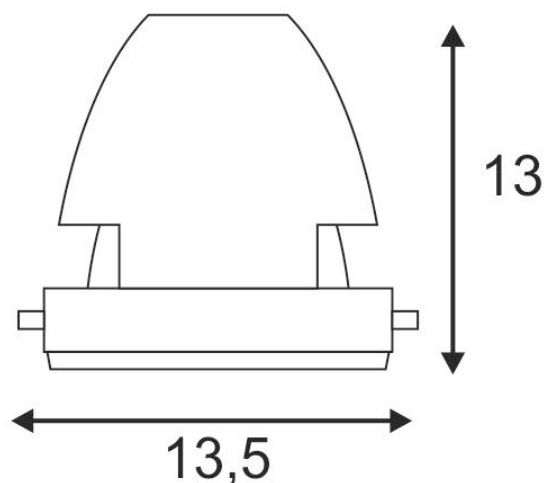

Article Table

DESCRIPTION	Order No.
COB LED MODULE, silver-grey, 30°, CRI65+ for AIXLIGHT PRO installation frame	LI115243
Optional Accessories	
LED Driver 36W, 700mA, dimmable	LI1001267
Structure glass for AIXLIGHT PRO fitting housing	LI115170
AIXLIGHT PRO ZIERRING, aluminium, white	LI115600
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dimmable inkl. Cable relief	LI464032
LED-Driver, 40W, 700mA, incl. strain relief	LI464168
LED-Driver, 40W, 700mA, incl. strain relief, dimmable	LI464174