Data Sheet for Article: LI158744--

I-VIDUAL, 4000K, silver-grey, L/W 59.5/59.5 cm

LED panel for grid ceilings

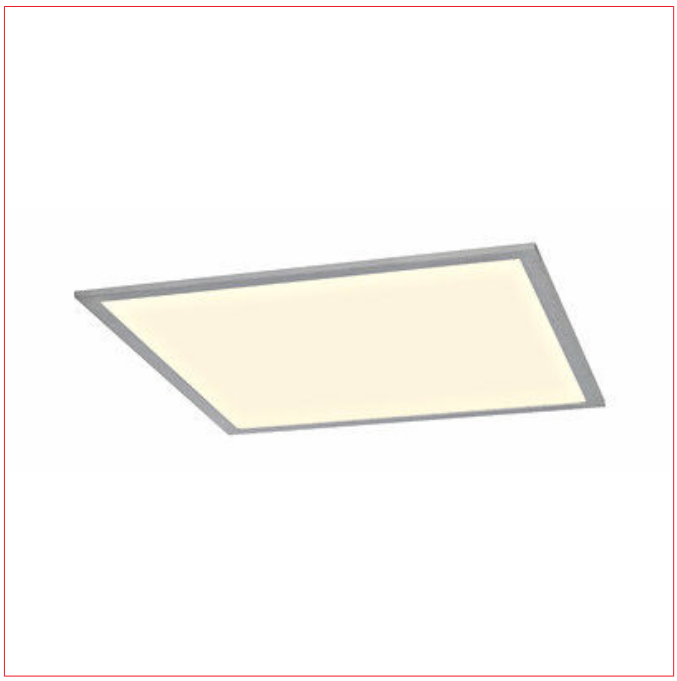

Technical Data

Net length (mm)	595,00
Net width (mm)	595,00
Net height (mm)	13,00
Net weight (kg)	3,70
Mounting	recessed mounting ceiling
Colour	Silver grey
Material	Aluminum Acrylic
Manufacturer	03-SLV
Operation current mA (mA)	1050
Colour temperature (K)	4000
Colour rendering index (Ra)	80
Luminous flux (lm)	3650
Live time	30.000h
Protection class	III
Energy efficiency class	A++|A+|A
Mounting depth (mm)	50

Created online on 2020-07-24, No liability for errors. All information subject to change.

Technical Data - continued

Illuminant incl.	yes
LxWxH mm	595x595x13

Dimensioned drawing: I-VIDUAL, 4000K, silver-grey, L/W 59.5/59.5 cm

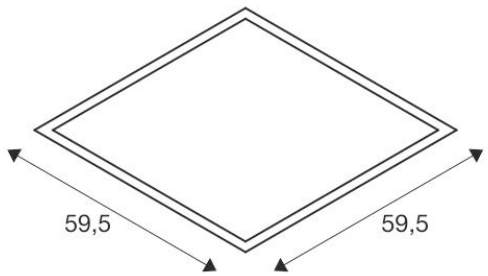

Article Table

DESCRIPTION	Order No.
I-VIDUAL, 4000K, silver-grey, L/W 59.5/59.5 cm LED panel for grid ceilings	LI158744
Optional Accessories	
Universal-frame for LED-Panel, 595x595mm, white	LI158762
INSTALLATION FRAME, silver-grey, L/W 60.5/60.5 cm for I-VIDUAL LED panel	LI158764
rosette, 10,3cm x 22cm x 5,1cm, matt white	LI158791
Suspension set for LED Panel	LI158799
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dimmable inkl. Cable relief	LI464032
LED-Driver, 40W, 1000mA, incl. strain relief	LI464170
LED-Driver, 40W, 1000mA, incl. strain relief, dimmable	LI464176

Created online on 2020-07-24, No liability for errors. All information subject to change.

www.schrack.com

Get Ready. **Get Schrack.**