

Data Sheet for Article: LI28000239

Led Downlight MR16, 10W, 2700K, 600lm, 38°, 230V, Dim




Technical Data

Net height (mm)	50,00
Net diameter (mm)	56,00
Net weight (kg)	0,10
Mounting	recessed mounting ceiling
Colour	White
Material	Plastic Metal
Manufacturer	O2-Schrack
Beam angle (°)	38
Operation current mA (mA)	43
Operating voltage AC (V)	220-240
Light source	SMD LED
Lamp holder	MR16
Watt (W)	10
System efficiency (lm/W)	60
Light colour	warm white
Colour temperature (K)	2700
Colour rendering index (Ra)	≥90

Technical Data - continued

Luminous flux (lm)	600
Live time	25.000h
Dimmable	yes
IP Rating	IP20
Diameter (mm)	56
ØxH mm	56x50

Dimensioned drawing: Led Downlight MR16, 10W, 2700K, 600lm, 38°, 230V, Dim

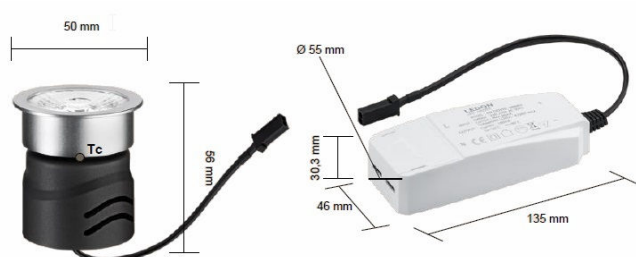

Article Table

DESCRIPTION	Order No.
Led Downlight MR16, 10W, 2700K, 600lm, 38°, 230V, Dim	LI28000239
Optional Accessories	
Downlight Frame 90, Brushed Aluminium, Square, Click-In Click-in Montage	LI28000524
Downlight Frame 90, Brushed Aluminium, Round, Click-In Click-in Montage	LI28000525
Downlight Frame 90, Ral 9016 white, Square, Click-In Click-in Montage	LI28000526
Downlight Frame 90, Ral 9016 white, Round, Click-In Click-in Montage	LI28000527
Downlight Frame 90, Ral 9022 silver matt, Square, Click-In Click-in Montage	LI28000528
Downlight Frame 90, Ral 9022 silver matt, Round, Click-In Click-in Montage	LI28000529