



Data Sheet for Article: LI29001133

Led Flat Downlight 15W,840, 1250lm, 110°, 350mA,excl. Driver



Light distribution curve





Technical Data

Mounting	recessed mounting wall recessed mounting ceiling
Colour	White
Material	Plastic Metal
Emission angle (°)	110
Operating voltage DC (V)	22-24
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	15
System efficiency (lm/W)	83
Light colour	neutral white

Technical Data - continued

Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1250
Live time (h)	50.000 / 70 / B10
Dimmable	no
IP Rating	IP20
Diameter (mm)	190
ØxH mm	190x24

Dimensioned drawing: Led Flat Downlight 15W,840, 1250lm, 110°, 350mA,excl. Driver

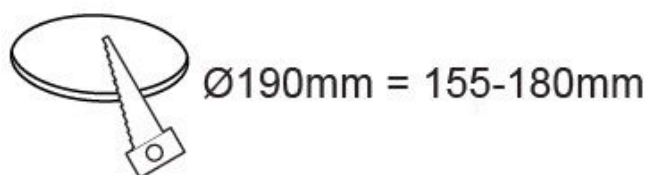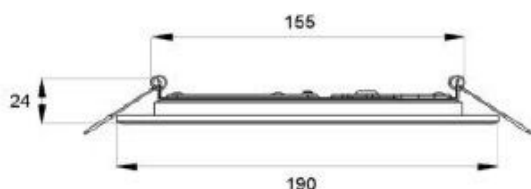

Article Table

DESCRIPTION	Order No.
Led Flat Downlight 15W,840, 1250lm, 110°, 350mA,excl. Driver	LI29001133
Optional Accessories	
Led Driver for 15W, 220-240V CC 350mA	LI29001137
Tridonic LCI 20W 350mA TEC SR	LI87500187
LED DRIVER 10W, 110-240V CC 350mA 2-43VDC DALI	LI29001166
LED DRIVER 15W, 110-240V CC 350mA 2-43VDC 1-10V & PUSH	LI29001164