

Data Sheet for Article: LI42919037

RL-PAR16 35 DIM 3,3W 230V 36° 840 230lm 565cd GU10 25000h




Technical Data

Make-up	PAR16
Beam angle (°)	36
Operating voltage AC (V)	230
Version	klar
Cycle of operation	100000
Socket	GU10
Watt (W)	3,30
Power (W)	3,30
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	230
Candela	565
Service life	25.000h
Dimmable	yes
Diameter (mm)	50
Ignition time (s)	0,30
Power Factor	0,83

Technical Data - continued

Comparable Wattage incandescent lamp	35
Colour stability MacAdam (sdcm)	<=5

**Energieeffizienzklasse: RL-PAR16 35 DIM 3,3W 230V 36° 840 230lm 565cd
GU10 25000h**

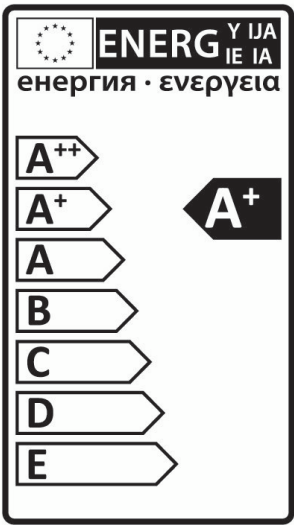

DESCRIPTION	Order No.
RL-PAR16 35 DIM 3,3W 230V 36° 840 230lm 565cd GU10 25000h	LI42919037