

Data Sheet for Article: LI43119045

RL-MR16 35 DIM 5W 12V 36° 840 350lm 950cd GU5.3 25000h




Technical Data

Manufacturer	09-Radium
Luminous flux (lm)	350
Candela	950
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤5
Service life	25.000h
Dimmable	yes
Socket	GU5,3
Beam angle (°)	36
Operating voltage AC (V)	12
Make-up	PAR16
Length (mm)	46
Diameter (mm)	51
Cycle of operation	100000
Watt (W)	5
Power (W)	5

Technical Data - continued

Ignition time (s)	1
Power Factor	0,89

Energieeffizienzklasse: RL-MR16 35 DIM 5W 12V 36° 840 350lm 950cd GU5.3 25000h

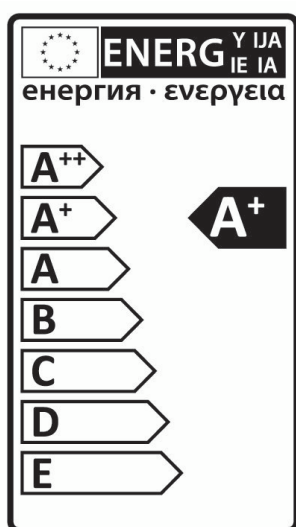

Article Table

DESCRIPTION	Order No.
RL-MR16 35 DIM 5W 12V 36° 840 350lm 950cd GU5.3 25000h	LI43119045