

Data Sheet for Article: LI43519242

RL-MR16 43 DIM 7,8W 12V 36° 930 500lm 1150cd GU5,3 40000h




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Manufacturer	09-Radium
Luminous flux (lm)	500
Candela	1150
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	≤ 6
Service life	40.000h
Dimmable	yes
IP Rating	IP20
Energy efficiency class new from 01.09.2021	G
Energy efficiency class	G
Socket	GU5,3
Beam angle (°)	36
Operating voltage AC (V)	12
Make-up	PAR16

Technical Data - continued

Diameter (mm)	51
Version	Filament
Watt (W)	7,80
Power (W)	7,80
Power Factor	≥ 0.90

**Energieeffizienzklasse: RL-MR16 43 DIM 7,8W 12V 36° 930 500lm 1150cd
GU5,3 40000h**

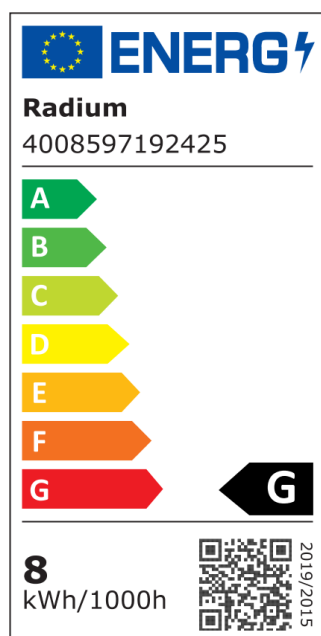

Article Table

DESCRIPTION	Order No.
RL-MR16 43 DIM 7,8W 12V 36° 930 500lm 1150cd GU5,3 40000h	LI43519242