

Data Sheet for Article: LI43619208

RL-PAR16 50 4,3W 230V 120° 827 350lm 130cd VWFL GU10




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Manufacturer	09-Radium
Luminous flux (lm)	350
Candela	130
Light colour	warm white comfort
Colour temperature (K)	2700
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤ 6
Service life	15.000h
Dimmable	no
IP Rating	IP20
Energy efficiency class new from 01.09.2021	F
Energy efficiency class	F
Socket	GU10
Beam angle (°)	120
Operating voltage AC (V)	230
Make-up	PAR16

Technical Data - continued

Diameter (mm)	51
Version	Filament
Watt (W)	4,30
Power (W)	4,30
Power Factor	≥ 0.90

Energieeffizienzklasse: RL-PAR16 50 4,3W 230V 120° 827 350lm 130cd VWFL GU10

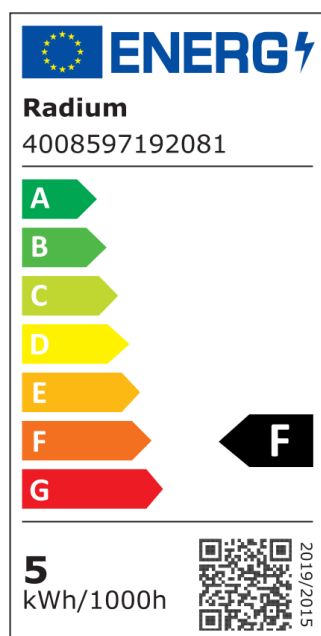

Article Table

DESCRIPTION	Order No.
RL-PAR16 50 4,3W 230V 120° 827 350lm 130cd VWFL GU10	LI43619208