

Data Sheet for Article: LI43719792

RL-T8 36 SP 12, 7W 840 2100lm G13 190° matt EM 1200mm

LED retrofit tube for operation with a magnetic ballast




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	50
Luminous flux (lm)	2100
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤ 5
Service life	75.000h
Dimmable	no
IP Rating	IP20
EEC	C
Socket	G13
Beam angle (°)	190
Operating voltage AC (V)	220-240
Colour	opal
Material	Glass
Make-up	Röhrenform

Technical Data - continued

Lenght (mm)	1200
Diameter (mm)	26,70

Energieeffizienzklasse: RL-T8 36 SP 12,7W 840 2100lm G13 190° matt EM 1200mm

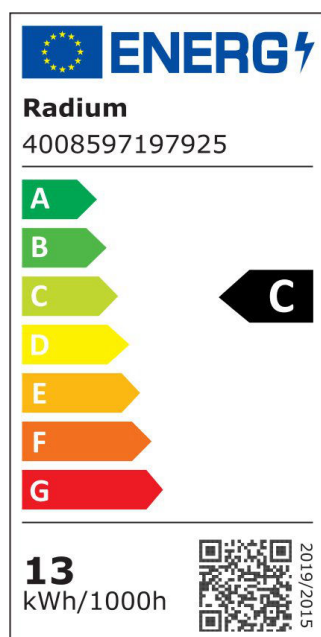

DESCRIPTION	Order No.
RL-T8 36 SP 12,7W 840 2100lm G13 190° matt EM 1200mm LED retrofit tube for operation with a magnetic ballast	LI43719792