

Data Sheet for Article: LI43720047

# RL-T8 36 SP UO 14,9W 865 2600lm G13 190° matt EM 1200mm


LED retrofit tube for operation with a magnetic ballast



## Technical Data

|                               |            |
|-------------------------------|------------|
| Min. ambient temperature (°C) | -20        |
| Max. ambient temperature (°C) | 50         |
| Luminous flux (lm)            | 2600       |
| Colour temperature (K)        | 6500       |
| Colour rendering index (Ra)   | ≥80        |
| Dimmable                      | no         |
| EEC                           | C          |
| Socket                        | G13        |
| Beam angle (°)                | 190        |
| Operating voltage AC (V)      | 220-240    |
| Colour                        | opal       |
| Material                      | Glass      |
| Make-up                       | Röhrenform |
| Length (mm)                   | 1200       |
| Diameter (mm)                 | 26,70      |

**Energieeffizienzklasse: RL-T8 36 SP UO 14,9W 865 2600lm G13 190° matt EM 1200mm**

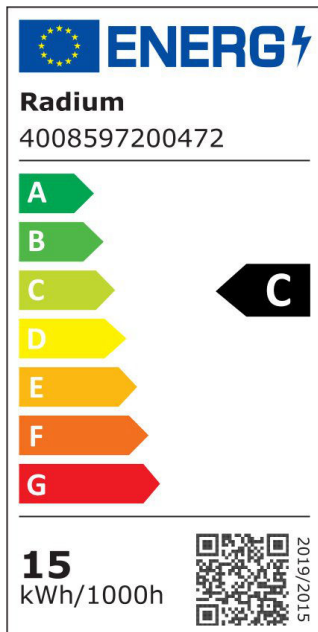

## DESCRIPTION

Order No.

RL-T8 36 SP UO 14,9W 865 2600lm G 13 190° matt EM 1200mm  
LED retrofit tube for operation with a magnetic ballast

LI43720047