

Data Sheet for Article: LI43920134

RL-T8 58 24W 830 2550lm G13 190° matt UN 1500mm


LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter



Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminous flux (lm)	2550
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Dimmable	no
EEC	F
Socket	G13
Beam angle (°)	190
Operating voltage AC (V)	230
Colour	opal
Material	Glass
Make-up	Röhrenform
Length (mm)	1500
Diameter (mm)	28

Energieeffizienzklasse: RL-T8 58 24W 830 2550lm G13 190° matt UN 1500mm

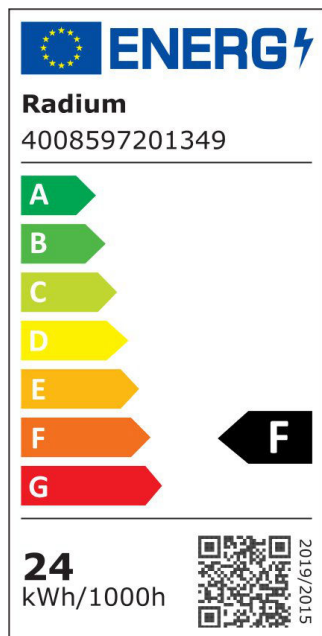

DESCRIPTION	Order No.
RL-T8 58 24W 830 2550lm G13 190° matt UN 1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter	LI43920134