

Data Sheet for Article: LI43920279

RL-T5 80 HO 37W 840 5600lm 230V G5 160° matt AC 1449mm

T5 retrofit tube for operation at 230V




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminous flux (lm)	5600
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤ 5
Service life	50.000h
Dimmable	no
IP Rating	IP20
EEC	D
Socket	G5
Beam angle (°)	160
Operating voltage AC (V)	230
Colour	opal
Material	Glass
Make-up	Röhrenform

Technical Data - continued

Lenght (mm)	1449
Diameter (mm)	19

Energieeffizienzklasse: RL-T5 80 HO 37W 840 5600lm 230V G5 160° matt AC 1449mm

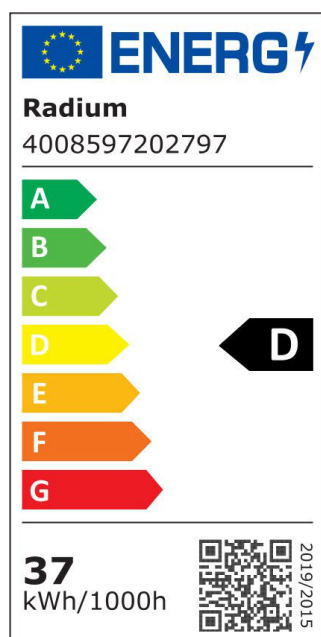

DESCRIPTION	Order No.
RL-T5 80 HO 37W 840 5600lm 230V G5 160° matt AC 1449mm T5 retrofit tube for operation at 230V	LI43920279