

Data Sheet for Article: LI43920749

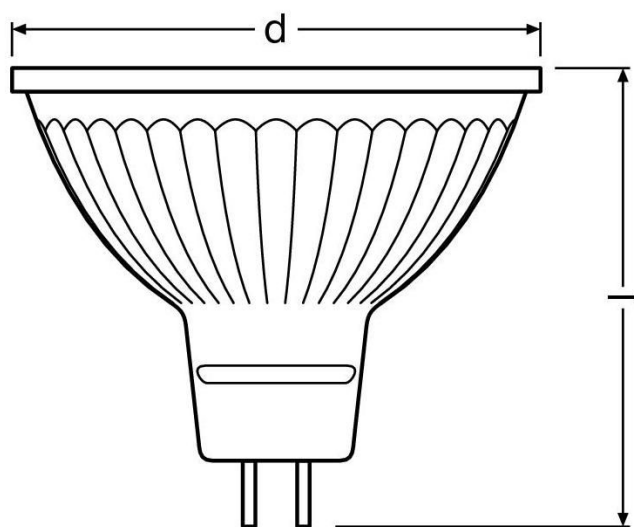
RL-MR16 50 6,5W 830 621lm 12V GU5.3 36°

LED low voltage reflector lamp



Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminous flux (lm)	621
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤ 6
Service life	15.000h
Cycle of operation	100000
Dimmable	no
IP Rating	IP20
EEC	G
Socket	GU5,3
Beam angle (°)	36
Operating voltage AC (V)	12
Operation current mA (mA)	720
Make-up	PAR16
Length (mm)	46
Diameter (mm)	51

Dimensioned drawing: RL-MR16 50 6,5W 830 621lm 12V GU5.3 36°

DESCRIPTION	Order No.
RL-MR16 50 6,5W 830 621lm 12V GU5.3 36° LED low voltage reflector lamp	LI43920749