

Data Sheet for Article: LI44020243

RL-T8 58 18,3W 865 2200lm G13 190° matt EM 1500mm

LED retrofit tube for operation with a magnetic ballast; including starter




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	45
Luminous flux (lm)	2200
Light colour	daylight
Colour temperature (K)	6500
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	≤ 6
Service life	30.000h
Dimmable	no
IP Rating	IP20
EEC	E
Socket	G13
Beam angle (°)	190
Operating voltage AC (V)	220-240
Colour	White
Material	Glass
Make-up	Röhrenform

Technical Data - continued

Lenght (mm)	1500
Diameter (mm)	26,70

**Energieeffizienzklasse: RL-T8 58 18,3W 865 2200lm G13 190° matt EM
1500mm**

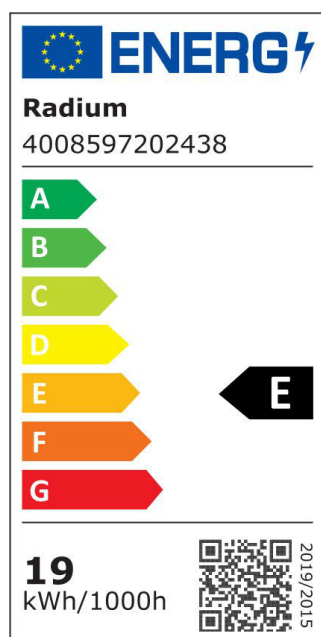

DESCRIPTION	Order No.
RL-T8 58 18,3W 865 2200lm G13 190° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI44020243