

Data Sheet for Article: LI44122562

RL-MR16 35 5W 345lm 927 12V 36° GU5.3

clear

LED low voltage reflector lamp



Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminous flux (lm)	345
Light colour	ultra warm white
Colour temperature (K)	2700
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	≤ 6
Service life	25000
Cycle of operation	100000
Dimmable	yes
IP Rating	IP20
EEC	G
Socket	GU5,3
Beam angle (°)	36
Operating voltage AC (V)	12
Colour	Clear
Material	Glass

Technical Data - continued


Make-up	PAR16
Length (mm)	44
Diameter (mm)	50

Energieeffizienzklasse: RL-MR16 35 5W 345lm 927 12V 36° GU5.3 clear



Radium

4008597225628

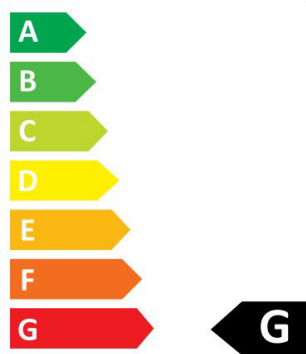

5
kWh/1000h



2019/2015

DESCRIPTION	Order No.
RL-MR16 35 5W 345lm 927 12V 36° GU5.3 clear LED low voltage reflector lamp	LI44122562