


Data Sheet for Article: LI50HDB144

Line 50 PL DI/IND 68W 7400lm 940 UGR<19 DALI, black, L-1411

Pendant luminaire made of aluminium direct / indirect; high output, UGR <19

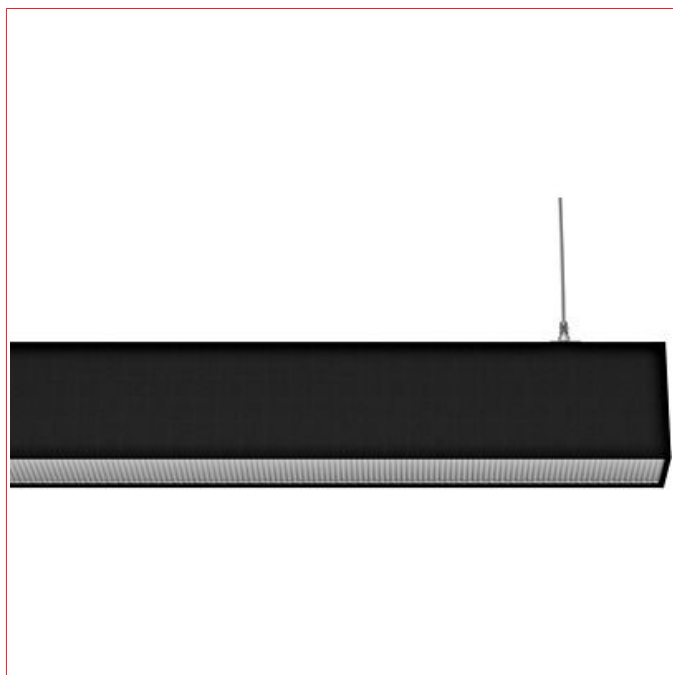


Technical Data

Luminous flux (lm)	7400
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥90
Glare factor (UGR)	19
Colour stability MacAdam (sdcm)	3
Service life	50.000h / L80 / B50
Dimmable	DALI Push to DIM
Protection class	1
IP Rating	IP20
Luminaire type	pendulum luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Power Factor	>0,9
Power (W)	68
Controller	LED driver

Technical Data - continued

Operating voltage AC (V)	220-240
Frequency (Hz)	50/60
Mounting	Pendant pendulum mounting
Colour	RAL 9005 (black)
Material	Aluminum
Cover	mikroprismatic
Temperature range - Operation (°C)	-20 to +30
LxWxH mm	1411x50x81

Dimensioned drawing: Line 50 PL DI/IND 68W 7400lm 940 UGR<19 DALI, black, L-1411

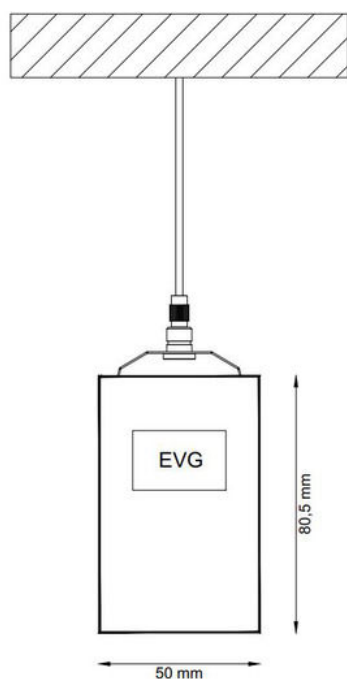

Article Table

DESCRIPTION	Order No.
Line 50 PL DI/IND 68W 7400lm 940 UGR<19 DALI, black, L-1411	LI50HDB144
Pendant luminaire made of aluminium direct / indirect; high output, UGR <19	