

Data Sheet for Article: LI50HDW144

Line 50 PL DI/IND 68W 7400lm 940 UGR<19 DALI, white, L-1411


Pendant luminaire made of aluminium direct / indirect; high output, UGR <19



Technical Data

Luminous flux (lm)	7719
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Service life	>50.000h
Dimmable	no
Protection class	I
IP Rating	IP20
System efficiency (lm/W)	127
Power (W)	64,30
Operating voltage AC (V)	220-240
Colour	White
Material	Aluminum
LxWxH mm	1411x50x81
Numbers of luminars per MCB B13	20
Numbers of luminars per MCB B16	25
Numbers of luminars per MCB C13	25
Numbers of luminars per MCB C16	32

Dimensioned drawing: Line 50 PL DI/IND 68W 7400lm 940 UGR<19 DALI, white, L-1411

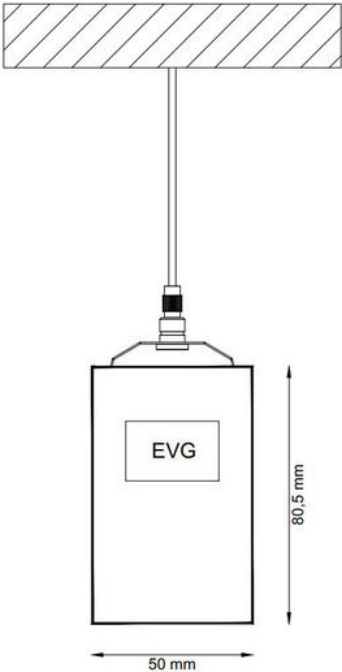

Article Table

DESCRIPTION	Order No.
Line 50 PL DI/IND 68W 7400lm 940 UGR<19 DALI, white, L-1411	LI50HDW144
Pendant luminaire made of aluminium direct / indirect; high output, UGR <19	