


Data Sheet for Article: LI6PX1018J

PERLA Ceiling 1x1W LED 4000K 70° glass matt, ALU wo. Driver




Technical Data

Cut-out size (mm)	Ø35
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	Aluminum anodised
Material	Aluminum Glass
Cover	matt
Emission angle (°)	70
Controller	without LED Driver
Operating voltage AC (V)	230
Light source	LED
Lamp holder	LED Platine
Watt (W)	1
Light colour	neutral white
Colour temperature (K)	4000

Technical Data - continued

luminous flux (lm)	93
Number of lamps	1
Appliance class	III
IP Rating	IP65
Mounting depth (mm)	36
illuminant incl.	yes
Diameter (mm)	40
Cut-out size mm	Ø35

Dimensioned drawing: PERLA Ceiling 1x1W LED 4000K 70° glass matt, ALU wo. Driver

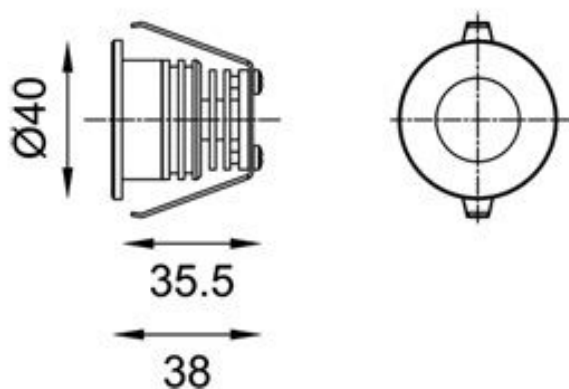

Article Table

DESCRIPTION	Order No.
PERLA Ceiling 1x1W LED 4000K 70° glass matt, ALU wo. Driver	LI6PX1018J
Optional Accessories	
LED Driver 15W 350mA 100-240V for Perla	LILL907AB0
LED Driver 1W 350mA IP20 for max. 1 Perla	LILL909AB0