

Data Sheet for Article: LI70112062

AOT-O LED, 35W, 4000K, 4450lm, IP50, acryl, opal, white, L-1260mm

Wannenleuchte




Technical Data

Net length (mm)	1.260,00
Net width (mm)	105,00
Net height (mm)	85,00
Net weight (kg)	2,70
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	25
Luminaire type	diffuser luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PMMA sheetsteel
Cover	opal
Beam angle (°)	90

Technical Data - continued

Controller	ECG
Operating voltage AC (V)	230
Lamp holder	LED Platine
System efficiency (lm/W)	127
Power (W)	35
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4450
Number of lamps	1
Service life	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP50
Shock strength	IK02
Illuminant incl.	yes
LxWxH mm	1260x105x85

Dimensioned drawing: AOT-O LED, 35W, 4000K, 4450lm, IP50, acryl, opal, white, L-1260mm

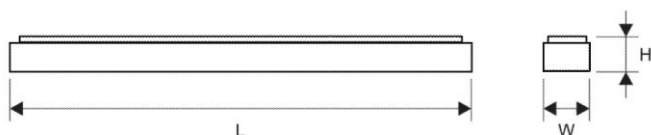

DESCRIPTION	Order No.
AOT-O LED, 35W, 4000K, 4450lm, IP50, acryl, opal, white, L-1260mm Wannenleuchte	LI70112062