

Data Sheet for Article: LI70121962

AOT-O LED, 54W, 3000K, 6250lm, IP50, acryl, opal, white, L-1560mm

Wannenleuchte




Technical Data

Net length (mm)	1.560,00
Net width (mm)	105,00
Net height (mm)	85,00
Net weight (kg)	3,50
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	25
Luminaire type	diffuser luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PMMA sheetsteel
Cover	opal
Beam angle (°)	90

Technical Data - continued

Controller	ECG
Operating voltage AC (V)	230
Lamp holder	LED Platine
System efficiency (lm/W)	116
Power (W)	54
Light colour	neutral white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	6250
Number of lamps	1
Service life	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP50
Shock strength	IK02
Illuminant incl.	yes
LxWxH mm	1560x105x85

Dimensioned drawing: AOT-O LED, 54W, 3000K, 6250lm, IP50, acryl, opal, white, L-1560mm

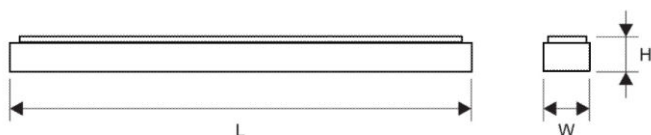

DESCRIPTION	Order No.
AOT-O LED, 54W, 3000K, 6250lm, IP50, acryl, opal, white, L-1560mm Wannenleuchte	LI70121962