



Data Sheet for Article: LI99001672

Lano PRO LED 43W, 4200lm, 840, microprismatic, DALI, white

LED Panel M625, Ra >80, UGR <19, 220-240V, SKII, IP20, aluminium

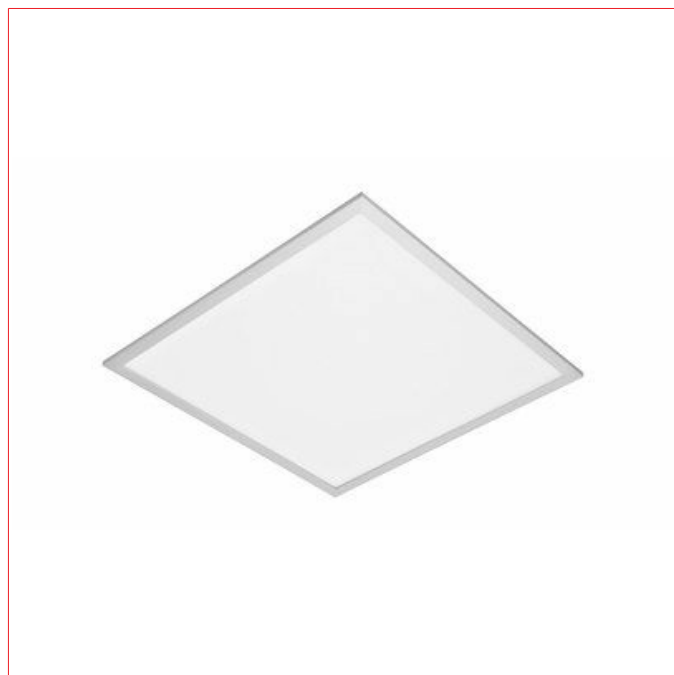


Technical Data

Net length (mm)	620,00
Net width (mm)	620,00
Net height (mm)	10,00
Net weight (kg)	4,00
Luminaire type	LED Panel
Mounting	Einlegeleuchte für Rasterdecken
Colour	RAL 9003 (white)
Material	Aluminum
Cover	mikroprismatic
Manufacturer	O2-Schrack
Emission angle (°)	120
Controller	LED driver
Operating voltage AC (V)	220-240
Light source	LED

Technical Data - continued

Lamp holder	LED Platine
Watt (W)	43
System efficiency (lm/W)	98
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4200
Number of lamps	1
Live time	40000
Dimmable	DALI Touch DIM
Protection class	II
IP Rating	IP20
Energy efficiency class	A++ A+ A
Illuminant incl.	yes
LxWxH mm	620x620x10

Dimensioned drawing: Lano PRO LED 43W, 4200lm, 840, microprismatic, DALI, white

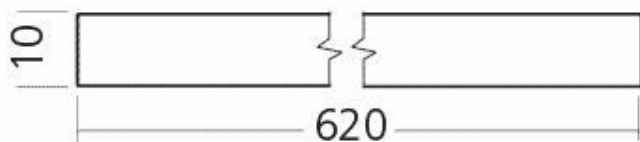

Article Table

DESCRIPTION	Order No.
Lano PRO LED 43W, 4200lm, 840, microprismatic, DALI, white	LI99001672
LED Panel M625, Ra >80, UGR <19, 220-240V, SKII, IP20, aluminium	