



Data Sheet for Article: LI99001718

CAPRI LED SYM 80W 10500lm, 5000K, Ra>70, IP65, black

LED Floodlight, symmetric, 110°

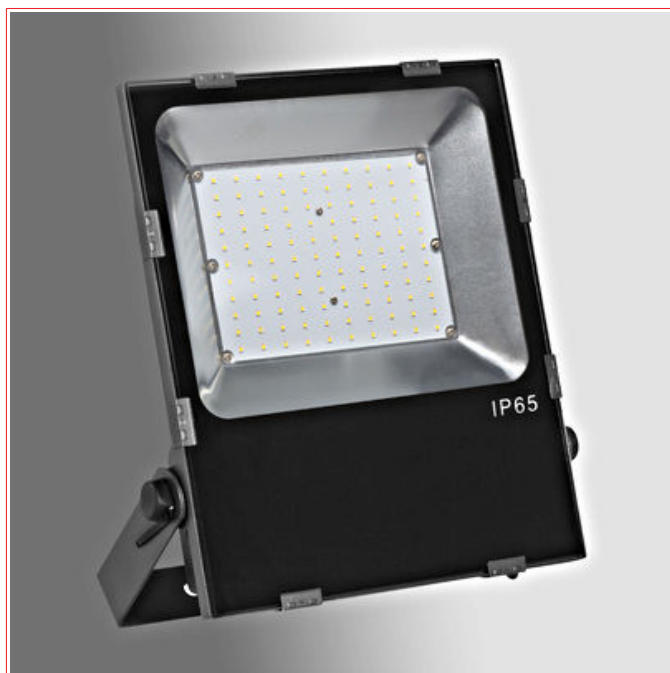

Light distribution curve



Technical Data

Net length (mm)	275,00
Net width (mm)	55,00
Net height (mm)	350,00
Net weight (kg)	3,50
Luminaire type	Floodlight
Mounting	surface mounting ceiling surface mounting wall floor mounting

Technical Data - continued

Colour	Black
Material	Hardened glass Die-cast aluminum
Cover	Clear
Manufacturer	01-Schrack-Trinity
Operating voltage AC (V)	220 - 240
Light source	LED
Lamp holder	LED Platine
Watt (W)	80
Light colour	cool white
Colour temperature (K)	5000
Colour rendering index (Ra)	>70
Luminous flux (lm)	10500
Live time	50.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP65
Energy efficiency class	A A++ A+
Shock strength	IK08
Illuminant incl.	yes
Temperature range - Operation (°C)	-30 to +35
LxWxH mm	275x55x350

Article Table

DESCRIPTION	Order No.
CAPRI LED SYM 80W 10500lm, 5000K, Ra>70, IP65, black LED Floodlight, symmetric, 110°	LI99001718