



Data Sheet for Article: LI99001745

SEGON Q LED 29W 3050lm 840, IP44, DALI, white

recessed downlight



Light distribution curve




Technical Data

Cut-out size (mm)	200 x 200
Luminaire type	downlight
Mounting	recessed mounting ceiling
Temperature range - Operation (°C)	-20 to +35
Colour	White
Material	Aluminum PMMA sheetsteel
Cover	mat
Manufacturer	O2-Schrack
Emission angle (°)	80
Glare factor (UGR)	<22

Technical Data - continued

Controller	EVG DALI
Operating voltage AC (V)	230
Light source	LED
Lamp holder	LED Platine
Watt (W)	29
System efficiency (lm/W)	105
Light colour	warm white
Colour temperature (K)	4000
Colour rendering index (Ra)	>80
Luminous flux (lm)	3050
Live time (h)	50.000 / L80 / B10
Dimmable	DALI
Protection class	II
IP Rating	IP20/44
Mounting depth (mm)	110
Illuminant incl.	yes
LxWxH mm	215x215x107
Cut-out size mm	200 x 200

Dimensioned drawing: SEGON Q LED 29W 3050lm 840, IP44, DALI, white

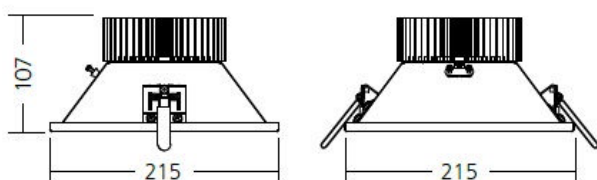

Article Table

DESCRIPTION	Order No.
SEGON Q LED 29W 3050lm 840, IP44, DALI, white recessed downlight	LI99001745