


Data Sheet for Article: LI9JL58765

LINDA BASIC LED 2x23W, 4000K, 6685lm, IP65, grey, L=1570mm

for Linux mounting rail installation



Light distribution curve




Technical Data

Net length (mm)	1.570,00
Net width (mm)	160,00
Net height (mm)	100,00
Net weight (kg)	3,70
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	Moisture proof luminaire

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall pendant
Colour	RAL 7035 (grau)
Material	Polycarbonate
Cover	transparent
Manufacturer	01-Schrack-Trinity
Glare factor (UGR)	<22
Controller	LED driver AC / DC
Operating voltage AC (V)	230
Lamp holder	LED Platine
Power of system (W)	52
System efficiency (lm/W)	262
Power (W)	2x23
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	6685
Number of lamps	2
Service life	80.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP65
Shock strength	IK10
Illuminant incl.	yes
LxWxH mm	1570x160x100

Dimensioned drawing: LINDA BASIC LED 2x23W, 4000K, 6685lm, IP65, grey, L=1570mm

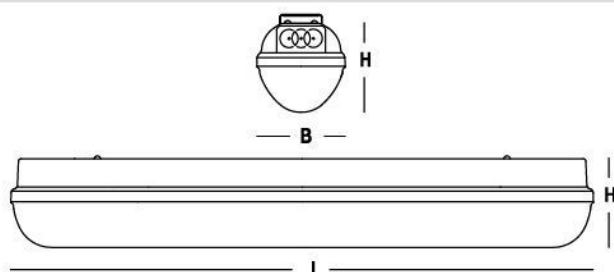

Article Table

DESCRIPTION	Order No.
LINDA BASIC LED 2x23W, 4000K, 6685lm, IP65, grey, L=1570mm for Linux mounting rail installation	LI9JL58765
Optional Accessories	
LINDA suspension hook for chain	LIMMMO2700