

Data Sheet for Article: LICT1889--

MARRA Pro LED 14,4W 1400lm/m 4000K

Ra>90, 24V, length 5M

LED Flexstrip natural white, only for indoor use




Technical Data

Power per Meter (W/m)	14,40
luminous flux/m (lm/m)	1400
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥90
Colour stability MacAdam (sdcm)	5
Service life	60.000h / L70 / B50
Dimmable	Depending on driver yes
IP Rating	IP00
Luminaire type	LED Strip
Illuminant incl.	yes
Beam angle (°)	120
Operating voltage DC (V)	24

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall floor mounting
Lenght (mm)	5000
Width (mm)	8
Height (mm)	1,50
Optional Accessories	LICT1872--;LICT1852--;LILPV10024;LILPV6024--;LILPV3524--;LIAP001001;LIAP001002;LIAP002003;LIAP002002;LIEK001100;LIEK001101;LIAB001001;LIAB001003;LIAB002003;LIEK001200;LIEK001201;LIEK002200;LIEK002201;LIEK002300;LIEK002301
LxWxH mm	5000x8x2
Net length (mm)	5.000,00
Net width (mm)	8,00
Net height (mm)	1,50
Net weight (kg)	0,10
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	50

Dimensioned drawing: MARRA Pro LED 14,4W 1400lm/m 4000K Ra>90, 24V, length 5M

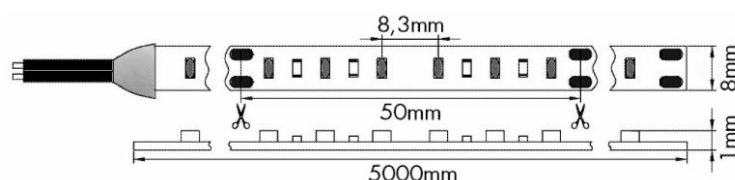

Article Table

DESCRIPTION	Order No.
MARRA Pro LED 14,4W 1400lm/m 4000K Ra>90, 24V, length 5M	LICT1889
LED Flexstrip natural white, only for indoor use	
Optional Accessories	
2 Pin Plug Connector for MARRA Pro 8mm (PU with 10 pcs)	LICT1872
Connector 2 Pin for MARRA Pro 8mm (PU with 10 pcs)	LICT1852
LED Power Supplies LPV 100W/24V, IP67	LILPV10024
LED Power Supplies LPV 60W/24V, IP67	LILPV6024
LED Power Supplies LPV 36W/24V, IP67	LILPV3524

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Aluminium Profile LBF, L-2000mm W-19mm H-8mm	LIAP001001
Aluminium profile LBR, L-2000mm W-19mm H-19mm	LIAP001002
Aluminium profile TBI, L-2000mm W-25mm H-27mm	LIAP002003
Aluminium profile TBR, L-2000mm W-25mm H-25mm	LIAP002002
Profile end cap LBF flat closed	LIEK001100
Profile end cap LBF flat with slotted hole	LIEK001101
PMMA cover LB flat transparent L-2000mm W-18mm H-6mm	LIAB001001
PMMA cover LB flat opal L-2000mm W-18mm H-6,4mm	LIAB001003
PMMA cover TB flat opal L-2000mm W-24mm H-6mm	LIAB002003
End cap LBR flat closed	LIEK001200
End cap LBR flat with slotted hole	LIEK001201
Profile end cap TBR flat closed	LIEK002200
Profile cap TBR flat with slotted hole	LIEK002201
Profile cap TBI flat closed	LIEK002300
Profile end cap TBI flat with slotted hole	LIEK002301