


Data Sheet for Article: LID10203--

10105XS/MC BRUSHED CHROME 50W

METAL €CONOMY

01 REC SPOTS FIX



Product Details

Recessed classic MR16 with GU5,3 lampholder. Complies with standard EN60598-1 and any other specific standards.




Technical Data

Dimmable	yes Depending on light source
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Light source	Low voltage halogen - reflector lamp LED Retrofit
Illuminant incl.	no
Number of lamps	1
Lamp holder	GU5,3
Power (W)	50

Technical Data - continued

Controller	Needs to be ordered separately
Operating voltage AC (V)	12
Operating voltage DC (V)	12
Input voltage AC (V)	12
Input voltage DC (V)	12
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 63
Mounting Depth mm (mm)	60
Colour	Chrome
Material	pressed metal
Height (mm)	22
Diameter (mm)	76
Necessary Accessories	LI44020746; LI13520--
ØxH mm	76x22
Cut-out size mm	Ø 63

Dimensioned drawing: 10105XS/MC BRUSHED CHROME 50W METAL

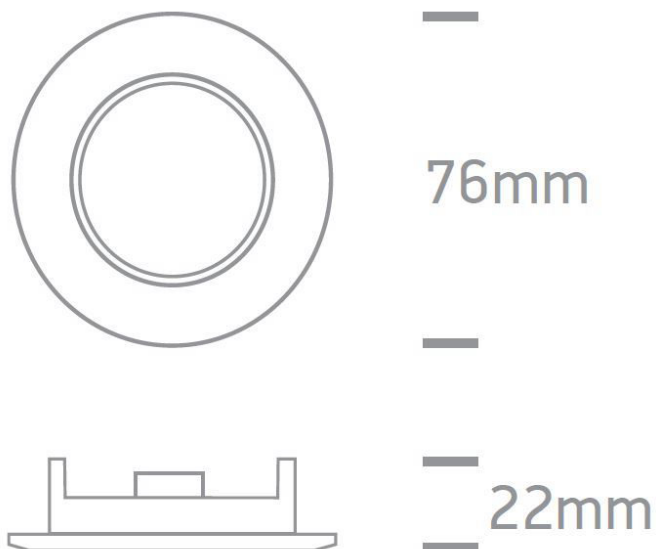

Article Table

DESCRIPTION	Order No.
10105XS/MC BRUSHED CHROME 50W METAL	LID10203
01 REC SPOTS FIX	
Necessary Accessories	
RL-MR16 35 3,8W 830 345lm 12V GU5.3 36°	LI44020746
LED low voltage reflector lamp	
89075W DRIVER 12V 0-75W 230V	LID13520
23 DRIVERS	