





Data Sheet for Article: LID10801--

Dewy LED 48W, 4000K, 4000lm, 230V, IP65, L=1270mm, PC/PC, gray **€ECONOMY**

Industrial luminaire, Moisture-proof diffuser



Light distribution curve



Technical Data

Luminaire type	Moisture proof luminaire
Mounting	surface mounting ceiling surface mounted wall
Colour	Gray
Material	PC
Emission angle (°)	120
Controller	LED driver
Operating voltage AC (V)	230


Technical Data - continued

Input voltage AC (V)	230
Output voltage AC (V)	25,5-42,5
Output current (A)	0,95
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	48
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4000
Live time (h)	30000
Dimmable	no
Protection class	I
IP Rating	IP65
Energy efficiency class	A
Illuminant incl.	yes
LxWxH mm	1270x136x90

Dimensioned drawing: Dewy LED 48W, 4000K, 4000lm, 230V, IP65, L=1270mm, PC/PC, gray



Dimensioned drawing: Dewy LED 48W, 4000K, 4000lm, 230V, IP65, L=1270mm, PC/PC, gray

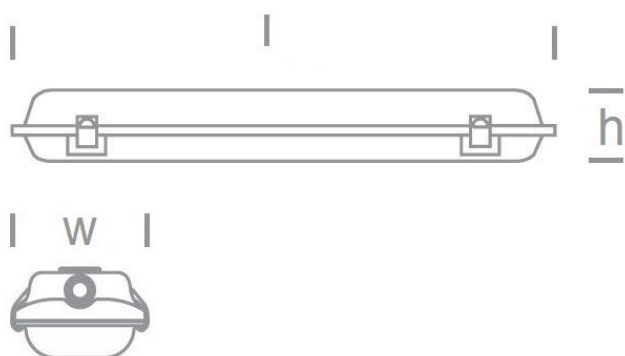

Article Table

DESCRIPTION	Order No.
Dewy LED 48W, 4000K, 4000lm, 230V, IP65, L=1270mm,PC/PC,gray Industrial luminarie, Moisture-proof diffuser	LID10801