


Data Sheet for Article: LID11049--

51105AB/AL ALUMINIUM 50W €ECONOMY

03 REC SPOTS ADJ



Product Details

Recessed adjustable MR16 spot with GU5.3 lampholder. _x000D_ _x000D_ Complies with standard EN60598-1 and any other specific standards.




Technical Data

Dimmable	yes Depending on light source
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire Recessed wall luminaire
Light source	Low voltage halogen - reflector lamp LED Retrofit
Illuminant incl.	no
Number of lamps	1
Lamp holder	GU5,3
Power (W)	50

Technical Data - continued

Controller	Needs to be ordered separately
Operating voltage AC (V)	12
Operating voltage DC (V)	12
Input voltage AC (V)	12
Input voltage DC (V)	12
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 80
Mounting depth (mm)	75
Colour	Aluminium
Material	Aluminum
Length (mm)	94
Width (mm)	94
Height (mm)	30
Optional Accessories	LI44020746
Necessary Accessories	LID13520--
LxWxH mm	94x94x30
Cut-out size mm	Ø 80

Dimensioned drawing: 51105AB/AL ALUMINIUM 50W

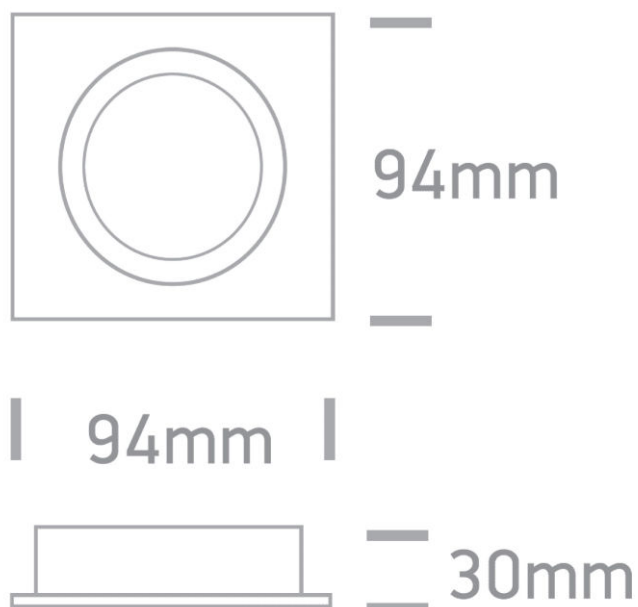

Article Table

DESCRIPTION	Order No.
51105AB/AL ALUMINIUM 50W 03 REC SPOTS ADJ	LID11049
Necessary Accessories	
89075W DRIVER 12V 0-75W 230V 23 DRIVERS	LID13520
Optional Accessories	
RL-MR16 35 3,8W 830 345lm 12V GU5.3 36° LED low voltage reflector lamp	LI44020746