



Data Sheet for Article: LID12038-A

Sigma Single LED 50W, 6000K, 3700lm, 120°, alu, anthracite **€ECONOMY**

LED floodlight



Light distribution curve




Technical Data

Luminaire type	Floodlight
Mounting	surface mounting ceiling surface mounting wall floor mounting mast mounting
Colour	Anthracite
Material	Aluminum
Cover	transparent

Technical Data - continued

Manufacturer	06-One Light
Beam angle (°)	120
Controller	LED driver
Operating voltage AC (V)	100-240
Light source	COB LED
Lamp holder	LED Platine
Watt (W)	50
Light colour	cool white
Colour temperature (K)	6000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	3700
Number of lamps	1
Protection class	I
IP Rating	IP65
Energy efficiency class	A
Illuminant incl.	yes
LxWxH mm	300x250x79

LID12038A

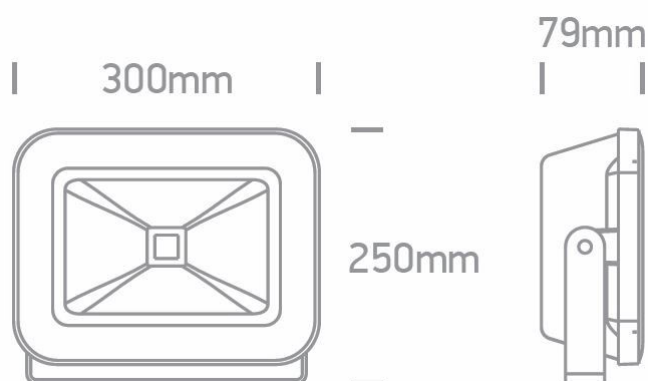

Article Table

DESCRIPTION	Order No.
Sigma Single LED 50W, 6000K, 3700lm, 120°, alu, anthracite LED floodlight	LID12038-A