




Data Sheet for Article: LID12039-A

Sigma Single LED 50W, 3000K, 3300lm, 120°, alu, anthracite **€ECONOMY**

LED floodlight

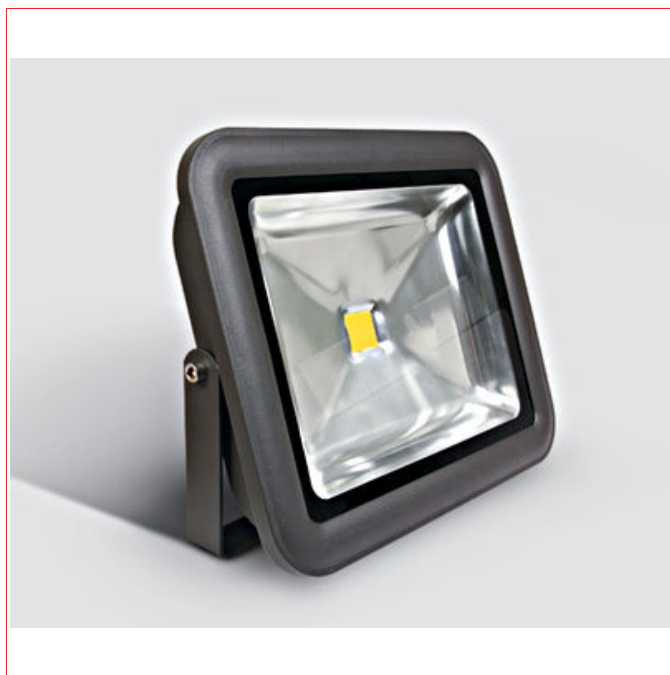

Light distribution curve




Technical Data

Luminaire type	Floodlight
Mounting	surface mounting ceiling floor mounting surface mounted wall mast mounting
Colour	Anthracite
Material	Aluminum
Cover	transparent

Technical Data - continued

Manufacturer	06-One Light
Emission angle (°)	120
Controller	LED driver
Operating voltage AC (V)	100-240
Light source	COB LED
Lamp holder	LED Platine
Watt (W)	50
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	3300
Number of lamps	1
Protection class	I
IP Rating	IP65
Energy efficiency class	A
Illuminant incl.	yes
LxWxH mm	300x250x79

Dimensioned drawing: Sigma Single LED 50W, 3000K, 3300lm, 120°, alu, anthracite



Article Table

DESCRIPTION	Order No.
Sigma Single LED 50W, 3000K, 3300lm, 120°, alu, anthracite LED floodlight	LID12039-A