




Data Sheet for Article: LID13065--

Sutil Round LED Panel 30W, 3000K, 1797lm, Ø300mm, grey **€ECONOMY**

Recessed downlight, complete with driver

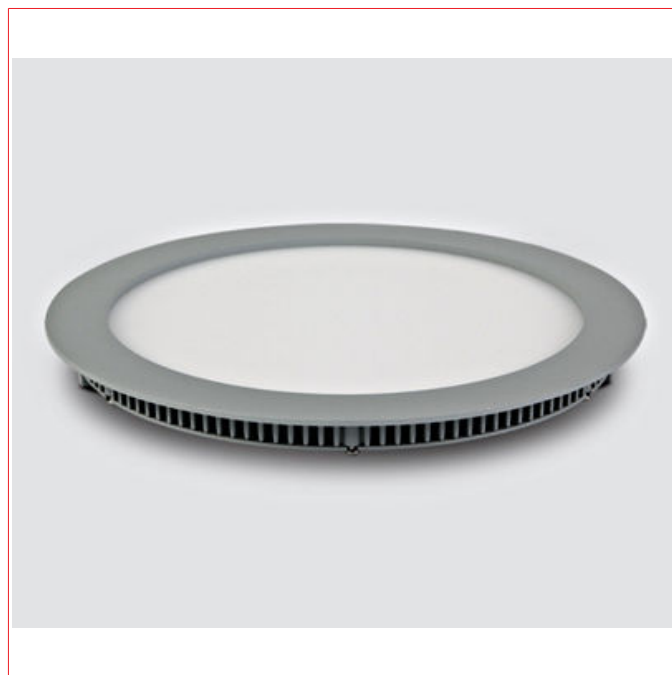

Light distribution curve



Technical Data

Cut-out size (mm)	Ø285
Luminaire type	Recessed ceiling luminaire Recessed wall luminaire
Mounting	surface mounting ceiling
Colour	Grey

Technical Data - continued

Material	Aluminum
Cover	opal
Manufacturer	06-One Light
Beam angle (°)	120
Controller	LED driver
Operating voltage AC (V)	100-240
Input voltage AC (V)	100-240
Output voltage DC (V)	23-28
Output current (A)	1
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	30
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1797
Number of lamps	1
Service life	30.000h
Protection class	II
IP Rating	IP40
Mounting depth (mm)	40
Illuminant incl.	yes
ØxH mm	300x14
Cut-out size mm	Ø285

Dimensioned drawing: Sutil Round LED Panel 30W, 3000K, 1797lm, Ø300mm, grey



Article Table

DESCRIPTION	Order No.
Sutil Round LED Panel 30W, 3000K, 1797lm, Ø300mm, grey	LID13065
Recessed downlight, complete with driver	
Optional Accessories	
89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V	LID14224
Adjustable output using DIP switches	