


Data Sheet for Article: LID13165--


62130AF/W/W WHITE PLAFO 30W WW IP40

230V **€ECONOMY**

14 PLAFO



Light distribution curve



Product Details

30W LED slim plafo light, IP40, suitable for residential and commercial application. Supplied with non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.




Technical Data

Luminous flux (lm)	2550
--------------------	------

Technical Data - continued

Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Service life	30.000h
Dimmable	no
Protection class	II
IP Rating	IP40
Luminaire type	surface mounted ceiling luminaire
Illuminant incl.	yes
Number of lamps	1
Lamp holder	LED Platine
Beam angle (°)	110
System efficiency (lm/W)	72
Power Factor	0,9
Power (W)	30
Controller	LED driver
Operating voltage AC (V)	220-240
Input voltage AC (V)	220-240
Operation current mA (mA)	1000
Input current (A)	1
Output current (A)	1
Frequency (Hz)	50/60
Mounting	surface mounting ceiling
Colour	White
Material	Die-cast aluminum
Cover	opal
Lenght (mm)	300
Width (mm)	300
Height (mm)	39
Optional Accessories	LID16949--
LxWxH mm	300x300x39

Dimensioned drawing: 62130AF/W/W WHITE PLAFO 30W WW IP40 230V

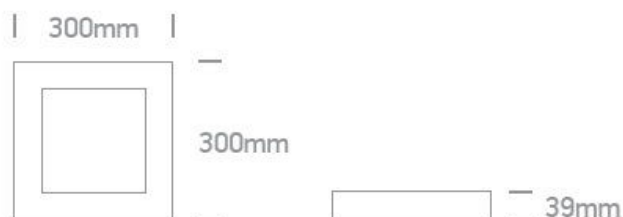

Dimensioned drawing: 62130AF/W/W WHITE PLAFO 30W WW IP40 230V



Article Table

DESCRIPTION	Order No.
62130AF/W/W WHITE PLAFO 30W WW IP40 230V 14 PLAFO	LID13165
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949