


Data Sheet for Article: LID13206--

Punto-F LED, 5W, 3000K, 425lm, 30°, 230V, IP44, aluminium €ECONOMY

Recessed ceiling spotlight




Technical Data

Cut-out size (mm)	Ø57
Luminaire type	Recessed ceiling luminaire Recessed wall luminaire
Mounting	recessed wall mounting recessed mounting ceiling
Colour	Aluminium
Material	Aluminum
Cover	Clear
Manufacturer	06-One Light
Beam angle (°)	30
Controller	LED driver
Operating voltage AC (V)	100-240
Input voltage AC (V)	100-240
Light source	COB LED

Technical Data - continued

Lamp holder	LED Platine
Watt (W)	5
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	425
Number of lamps	1
Protection class	II
IP Rating	IP44
Energy efficiency class	A
Mounting depth (mm)	90
Illuminant incl.	yes
ØxH mm	74x70
Cut-out size mm	Ø57

Dimensioned drawing: Punto-F LED, 5W, 3000K, 425lm, 30°, 230V, IP44, aluminium

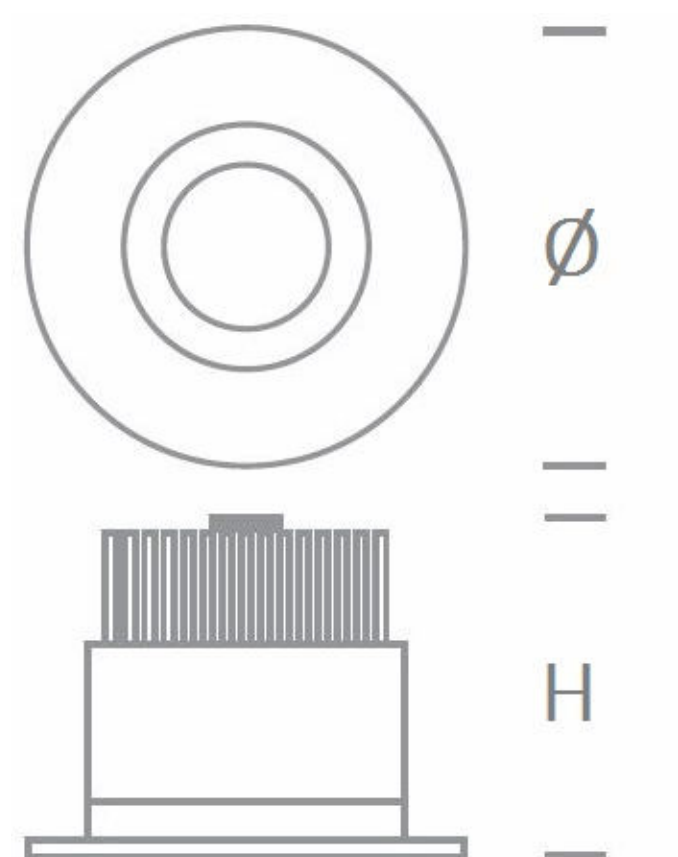

Article Table

DESCRIPTION	Order No.
Punto-F LED, 5W, 3000K, 425lm, 30°, 230V, IP44, aluminium Recessed ceiling spotlight	LID13206