



Data Sheet for Article: LID13442--

10112P/AL/W ALUMINIUM COB 12W WW

700mA IP64 €ECONOMY

02 REC SPOTS FIX LED

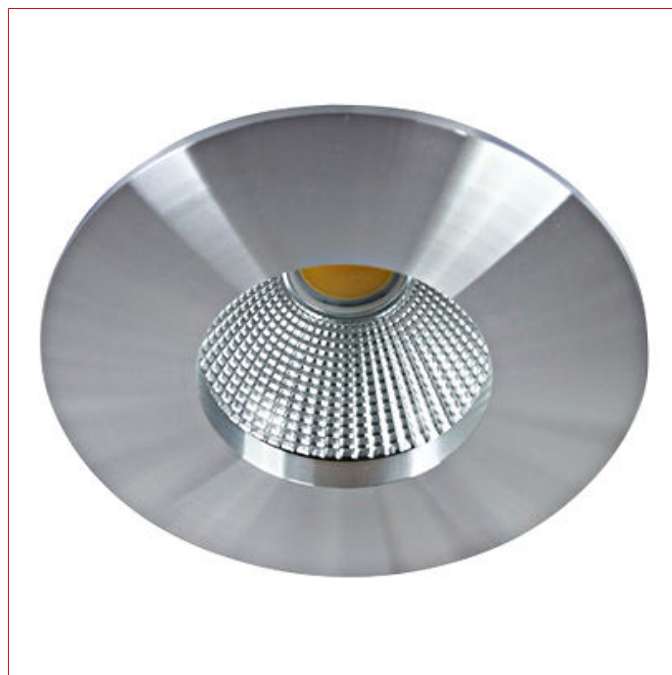

Product Details

12W COB LED recessed spot, IP64, for general application. Suitable for bathroom installation. Requires 700mA constant current driver. Complies with standard EN60598-1 and any other specific standards.




Technical Data

Luminous flux (lm)	1100
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP64
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes

Technical Data - continued

Number of lamps	1
Lamp holder	LED Platine
Beam angle (°)	40
System efficiency (lm/W)	91
Power (W)	12
Controller	Needs to be ordered separately
Operation current mA (mA)	700
Input current (A)	0,70
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 70
Mounting Depth mm (mm)	105
Colour	Aluminium
Material	Aluminum
Height (mm)	85
Diameter (mm)	83
Optional Accessories	LID16949--
Necessary Accessories	LID13081--;
ØxH mm	83x85
Cut-out size mm	Ø 70

**Dimensioned drawing: 10112P/AL/W ALUMINIUM COB 12W WW 700mA
IP64**

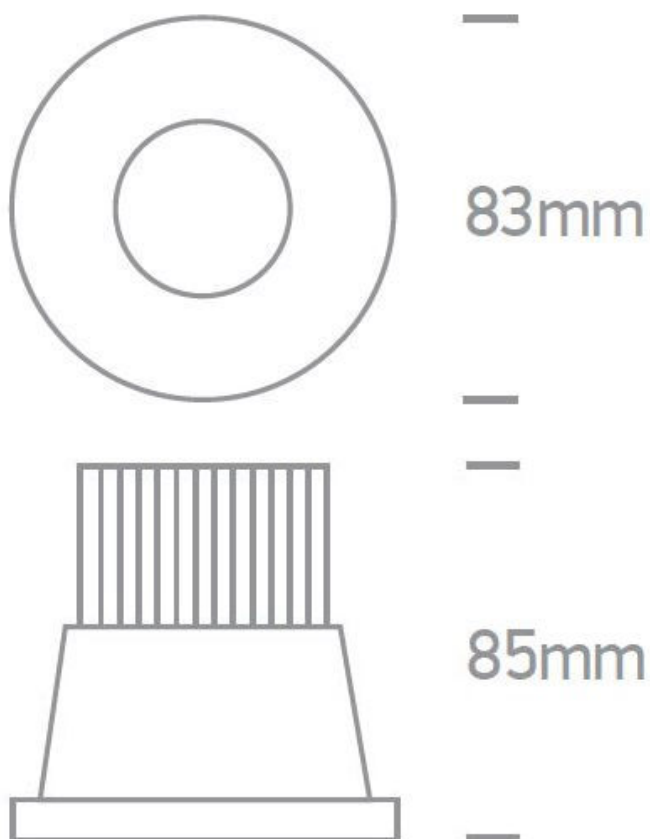

Article Table

DESCRIPTION	Order No.
10112P/AL/W ALUMINIUM COB 12W WW 700mA IP64 02 REC SPOTS FIX LED	LID13442
Necessary Accessories	
89015A DRIVER 700mA 7-15W 230V 23 DRIVERS	LID13081
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949