


Data Sheet for Article: LID13445--

Sutil-R LED 12W 2700K 745lm, IP40, white

Recessed downlight, complete with driver

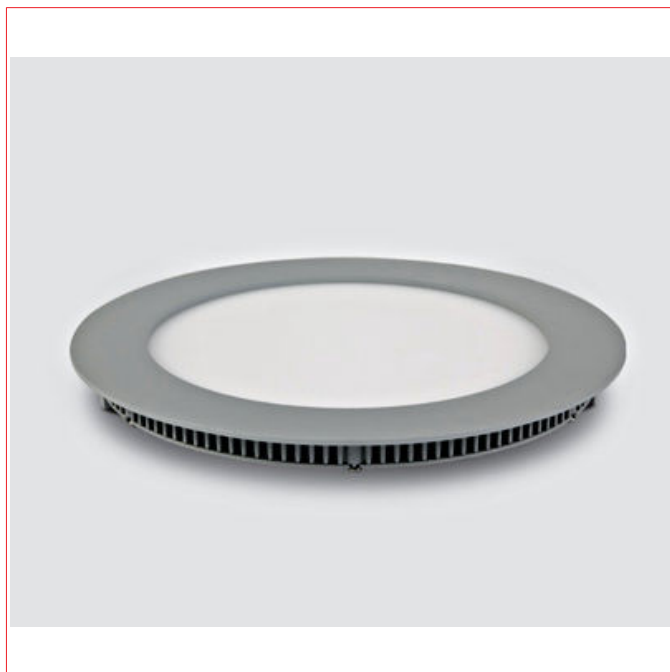

Technical Data

Manufacturer	06-One Light
Luminous flux (lm)	745
Light colour	ultra warm white
Colour temperature (K)	2700
Colour rendering index (Ra)	≥80
Dimmable	yes with optional, dimmable driver
Protection class	II
IP Rating	IP40
Luminaire type	Recessed ceiling luminaire
Light source	SMD LED
Number of lamps	1
Lamp holder	LED Platine
Beam angle (°)	120
Power (W)	12
Operating voltage AC (V)	100-240
Mounting	recessed mounting ceiling
Mounting depth (mm)	40
Colour	White
Material	Aluminum

Technical Data - continued

Optional Accessories	LID14224--
ØxH mm	178x20
Watt (W)	12

Article Table

DESCRIPTION	Order No.
Sutil-R LED 12W 2700K 745lm, IP40, white Recessed downlight, complete with driver	LID13445
Optional Accessories	
89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V Adjustable output using DIP switches	LID14224