


Data Sheet for Article: LID13615--

Marra LED Strip 19,2W/m 240LED/m 6000K 1400lm/m 24VDC IP20

LED Flexstrip, dimmable, 5 Meter Roll

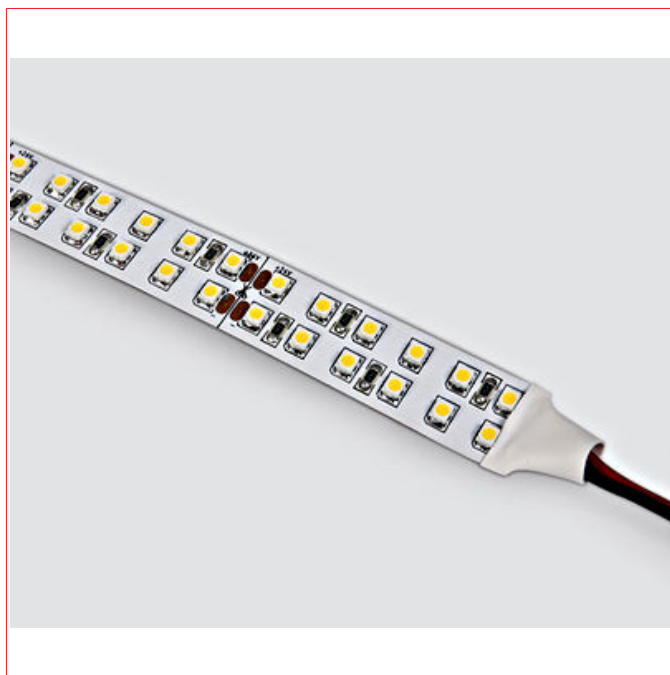

Technical Data

Power per Meter (W/m)	19,20
Light colour	daylight
Colour temperature (K)	6000
Colour rendering index (Ra)	≥80
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	LED Strip
Light source	SMD LED
Beam angle (°)	120
Operating voltage AC (V)	24
Operating voltage DC (V)	24
Mounting	surface mounting ceiling surface mounting wall floor mounting
Material	Plastic

Technical Data - continued

Lenght (mm)	5000
Width (mm)	16
Optional Accessories	LID13864--;LID13867--;LID13869--;LID13862--;LID13865--;LID13863--; LID16949--
luminous flux/m (lm/m)	1400

Article Table

DESCRIPTION	Order No.
Marra LED Strip 19,2W/m 240LED/m 6000K 1400lm/m 24VDC IP20 LED Flexstrip, dimmable, 5 Meter Roll	LID13615
Optional Accessories	
Aluminium profile 7912/AL + PC opal diffuser, 2 meters Suitable for LED Strips 7825, 7875, 7880	LID13864
Aluminium profile 7910/AL + PC opal diffuser, 2 meters Suitable for LED Strips 7820, 7821, 7830, 7831, 7870	LID13867
Aluminium wall profile 7916/AL + PC opal diffuser, 2 meters Suitable for LED Strips 7825, 7875, 7880	LID13869
Triange aluminium profile 7908/AL, +PC opal diffuser, 2 meters Suitable for LED Strips 7820, 7821, 7825, 7830, 7831, 7835, 7870, 7875, 7820W, 7830W, 7831W, 7835W	LID13862
Aluminium recessed profile 7912R/AL+PC opal diffuser, 2 meters Suitable for LED Strips 7820, 7821, 7825, 7830, 7831, 7835, 7870, 7875, 7820W, 7830W, 7831W, 7835W	LID13865
Aluminium recessed profile 7910R/AL+PC opal diffuser, 2 meters Suitable for LED Strips 7825, 7875, 7880	LID13863
Quick connector 32A 2x3-port	LID16949