



Data Sheet for Article: LID13757--

Lano Quadro LED Panel 40W, 4000K, 3200lm, M600, white **€ECONOMY**

IP20, SKIII, 50.000h, complete with 950mA driver




Technical Data

Luminaire type	LED Panel
Mounting	recessed mounting ceiling pendant
Colour	White
Material	Aluminum
Cover	opal
Beam angle (°)	120
Controller	LED driver
Operation current mA (mA)	950
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	40
Light colour	neutral white
Colour temperature (K)	4000

Technical Data - continued

Colour rendering index (Ra)	≥80
Luminous flux (lm)	3200
Service life	30.000h
Dimmable	yes
Protection class	III
IP Rating	IP20
Illuminant incl.	yes
LxWxH mm	600x600x15

Dimensioned drawing: Lano Quadro LED Panel 40W, 4000K, 3200lm, M600, white

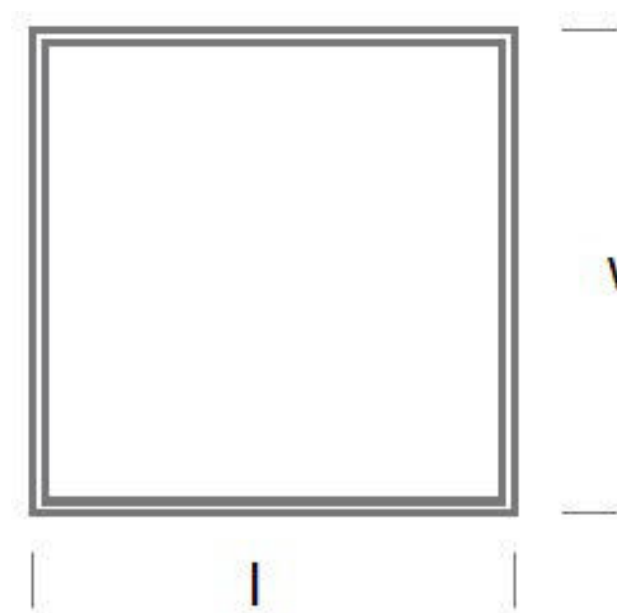

Article Table

DESCRIPTION	Order No.
Lano Quadro LED Panel 40W, 4000K, 3200lm, M600, white IP20, SKIII, 50.000h, complete with 950mA driver	LID13757
Optional Accessories	
Suspension set for Lano, rope length 1000mm (2 piece for Lano 1200 x 600)	LID13401
3-way connection box, IP20, Quick Fix	LID15379