


Data Sheet for Article: LID13820--

11103B/B/W BLACK COB 1W/2W WW

350mA/700mA ECONOMY

04 REC SPOTS ADJ LED

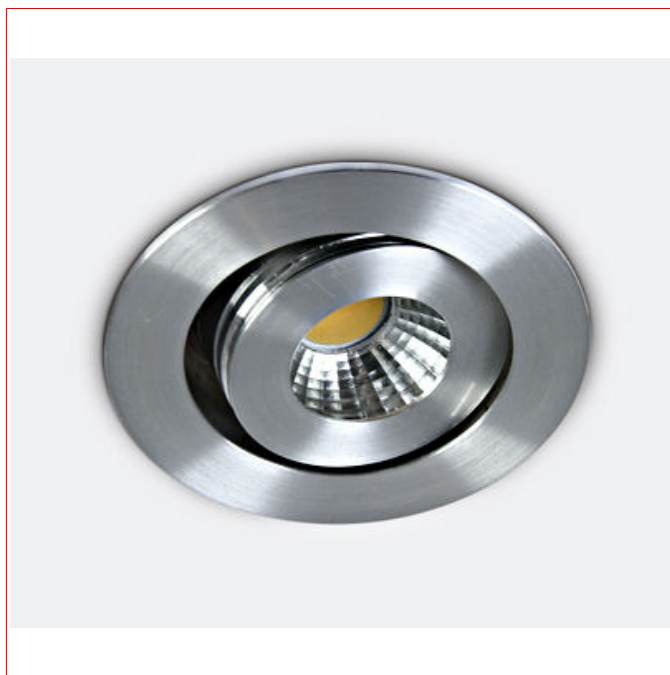

Product Details

1W/2W COB LED adjustable recessed spot IP20. Requires 350mA/700mA driver. Complies with standard EN60598-1 and any other specific standards.



Technical Data

Luminous flux (lm)	200
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes

Technical Data - continued

Number of lamps	1
Lamp holder	LED Platine
Beam angle (°)	40
System efficiency (lm/W)	100
Power (W)	1;2
Controller	Needs to be ordered separately
Operation current mA (mA)	350 / 700
Input current (A)	0,35/0,7
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 45
Mounting Depth mm (mm)	60
Colour	Black
Material	Aluminum
Height (mm)	36
Diameter (mm)	52
Optional Accessories	LID 16949--
Necessary Accessories	LID 13678--; LID 13677--; LID 16462--; LID 16463--;
ØxH mm	52x36
Cut-out size mm	Ø 45

Dimensioned drawing: 11103B/B/W BLACK COB 1W/2W WW 350mA/700mA



Article Table

DESCRIPTION	Order No.
11103B/B/W BLACK COB 1W/2W WW 350mA/700mA 04 REC SPOTS ADJ LED	LID13820
Necessary Accessories	
89004A DRIVER 700mA 2-4W IP66 230V 23 DRIVERS	LID13678
89004 DRIVER 350mA 1-4W IP66 230V 23 DRIVERS	LID13677
89004T DIMMABLE DRIVER 350mA 2-4W IP66 230V 23 DRIVERS	LID16462
89004AT DIMMABLE DRIVER 700mA 2-4W IP66 230V 23 DRIVERS	LID16463
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949