



Data Sheet for Article: LID13979--

Sutil Round2 LED 12W, 3000K, 720lm, 120°, IP40, grey €ECONOMY

LED recessed mounted panel

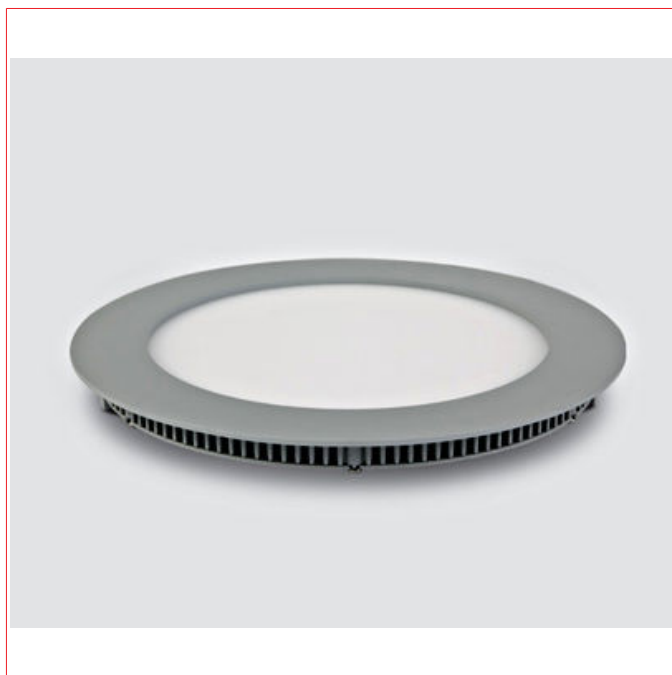

Technical Data

Cut-out size (mm)	Ø155
Luminaire type	LED Panel
Mounting	recessed mounting ceiling
Colour	Gray
Material	Aluminum
Manufacturer	06-One Light
Emission angle (°)	120
Controller	LED driver
Operating voltage AC (V)	230
Light source	SMD LED
Lamp holder	LED Platine
Watt (W)	12
Light colour	warm white
Colour temperature (K)	3000

Technical Data - continued

Colour rendering index (Ra)	≥80
Luminous flux (lm)	720
Number of lamps	1
Dimmable	no
Protection class	II
IP Rating	IP40
Energy efficiency class	A
Illuminant incl.	yes
ØxH mm	173x22
Cut-out size mm	Ø155
System efficiency (lm/W)	60
Diameter (mm)	173

Article Table

DESCRIPTION	Order No.
Sutil Round2 LED 12W, 3000K, 720lm, 120°, IP40, grey LED recessed mounted panel	LID13979
Optional Accessories	
LED Driver 250mA 12W for Sutil 2, triac dimmable	LID14015