


Data Sheet for Article: LID13986--

Sutil Round2 LED 30W, 6000K, 2100lm, 120°, IP40, white **ECONOMY**

Recessed downlight, complete with driver

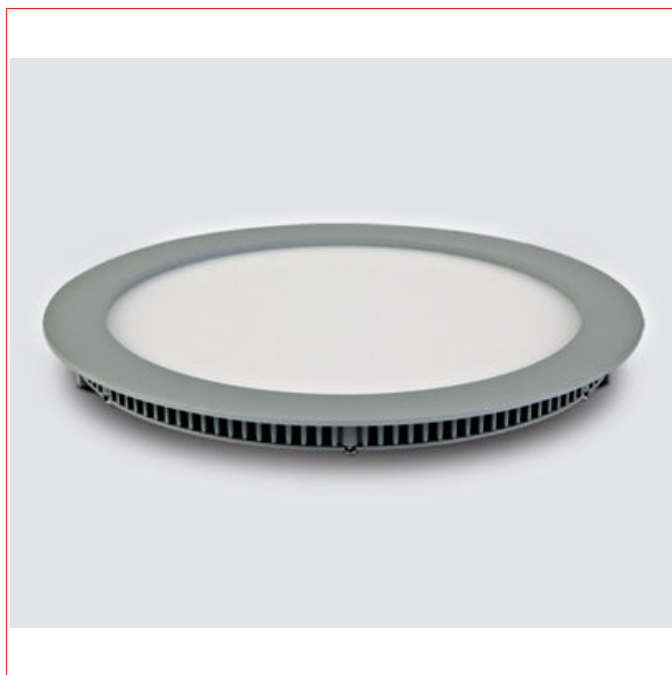


Technical Data

Manufacturer	06-One Light
Luminous flux (lm)	2100
Light colour	daylight
Colour temperature (K)	6000
Colour rendering index (Ra)	≥80
Dimmable	no
Protection class	II
IP Rating	IP40
Energy efficiency class	A
Luminaire type	LED Panel
Light source	SMD LED
Illuminant incl.	yes
Number of lamps	1
Lamp holder	LED Platine

Technical Data - continued

Beam angle (°)	120
System efficiency (lm/W)	70
Power (W)	30
Controller	LED driver
Operating voltage AC (V)	230
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø285
Colour	White
Material	Aluminum
Height (mm)	22
Diameter (mm)	295
Optional Accessories	LID14224--
ØxH mm	295x22
Cut-out size mm	Ø285
Watt (W)	30

Dimensioned drawing: Sutil Round2 LED 30W, 6000K, 2100lm, 120°, IP40, white



Article Table

DESCRIPTION	Order No.
Sutil Round2 LED 30W, 6000K, 2100lm, 120°, IP40, white	LID13986
Recessed downlight, complete with driver	
Optional Accessories	
89045L LED DRIVER DALI, Push, 1-10V, output 350-1100mA, 230V	LID14224
Adjustable output using DIP switches	