



Data Sheet for Article: LID14032--


50148AU/W/W WHITE LED 48w WW 62x62

UGR19 PANEL IP20 1200mA €ECONOMY

LED recessed mounted panel, requires 1200mA driver; 06 DOWNLIGHT FIX LED



Light distribution curve



Product Details

UGR19 62x62 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications. Requires 1200mA LED driver. Complies with standard EN60598-1 and any other specific standards.




Technical Data

Luminous flux (lm)	4000lm
--------------------	--------

Technical Data - continued

Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	LED Panel
Illuminant incl.	yes
Number of lamps	1
Lamp holder	LED Platine
Beam angle (°)	120
Power (W)	48
Controller	Needs to be ordered separately
Operation current mA (mA)	1200
Mounting	recessed mounting ceiling pendant
Mounting depth (mm)	55
Colour	White
Material	Aluminum
Length (mm)	620
Width (mm)	620
Height (mm)	10
Optional Accessories	LID 13401--; LID 15379--; LID 16949--
Necessary Accessories	LID 13319--; LID 13754--; LID 16598--
LxWxH mm	620x620x10
Watt (W)	48

**Dimensioned drawing: 50148AU/W/W WHITE LED 48w WW 62x62 UGR19
PANEL IP20 1200mA**

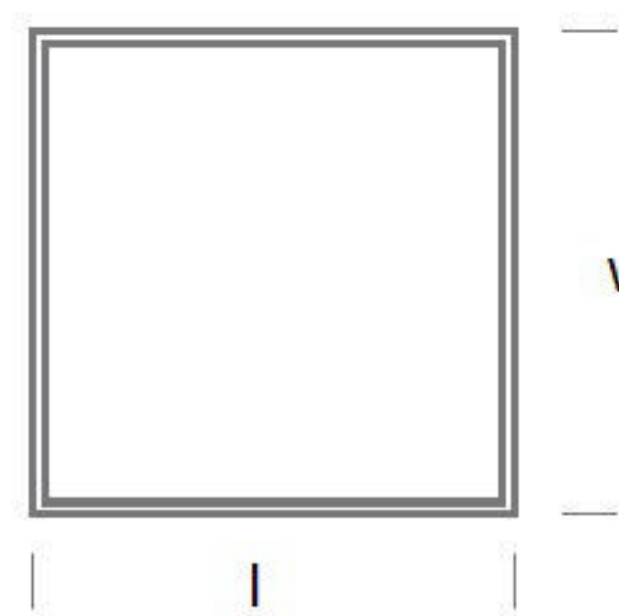

Article Table

DESCRIPTION	Order No.
50148AU/W/W WHITE LED 48w WW 62x62 UGR19 PANEL IP20 1200mA LED recessed mounted panel, requires 1200mA driver; 06 DOWNLIGHT FIX LED	LID14032
Necessary Accessories	
LED Treiber, 650-1400mA, 50W 25 LAMPS	LID13319
89048T TRIAC DIMMABLE DRIVER FOR 1200mA 48w PANELS 23 DRIVERS	LID13754
89050TLD DALI/PUSH TO DIM/ 1-10V /TRIAC UNIVERSAL DRIVER 50W IP20 230V; 23 DRIVERS	LID16598
Optional Accessories	
050017 SUSPENSION KIT FOR LED PANELS 2 piece for Lano 1200 x 600; 06 DOWNLIGHT FIX LED	LID13401
3-way connection box, IP20, Quick Fix 26 ACCES&GADGETS	LID15379
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949