


Data Sheet for Article: LID14132--

Lano Quadro LED Panel 40W, 4000K, 3400lm, 230V, M620, white

IP20, including Driver

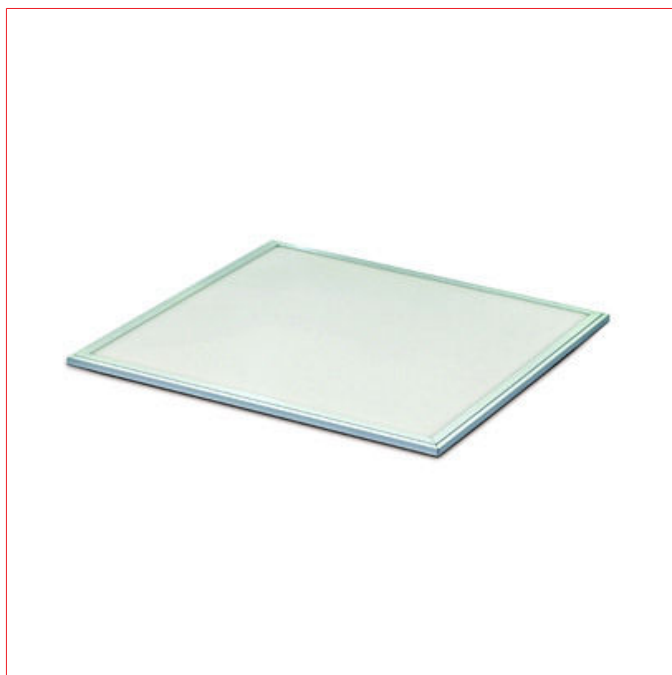

Technical Data

Luminaire type	LED Panel
Mounting	recessed mounting ceiling pendant
Colour	White
Material	Aluminum
Cover	opal
Manufacturer	O6-One Light
Beam angle (°)	120
Controller	LED driver AC
Input voltage AC (V)	230
Operation current mA (mA)	950
Light source	SMD LED
Watt (W)	40
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	3400

Technical Data - continued

Service life	30.000h
Dimmable	yes
Protection class	II
IP Rating	IP20
Mounting depth (mm)	50
Illuminant incl.	yes

Article Table

DESCRIPTION	Order No.
Lano Quadro LED Panel 40W, 4000K, 3400lm, 230V, M620, white IP20, including Driver	LID14132
Optional Accessories	
LED Driver, DALI & Push to dimm, 700-1400mA, 50W	LID13668
Suspension set for Lano, rope length 1000mm (2 piece for Lano 1200 x 600)	LID13401
3-way connection box, IP20, Quick Fix	LID15379