


Data Sheet for Article: LID14511--

68004/AL/W ALUMINIUM RECESSED 3W WW DARK LIGHT IP54 350mA €ECONOMY

recessed wall luminaire, without driver; 19 WALL REC & INGRND



Product Details

3W 350mA LED wall recessed light, IP54, ideal for both indoor and outdoor installation. Requires 350mA driver. Supplied with box for concrete installation. Complies with standard EN60598-1 and any other specific standards.




Technical Data

Luminous flux (lm)	120
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP54
Luminaire type	Recessed wall luminaire

Technical Data - continued

Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	24
System efficiency (lm/W)	40
Power (W)	3
Controller	Needs to be ordered separately
Operation current mA (mA)	350
Input current (A)	0,35
Mounting	recessed wall mounting
Cut-out size (mm)	Ø 49
Mounting depth (mm)	110 (zement), 70 (gips)
Colour	Aluminium
Material	Aluminum
Lenght (mm)	56
Width (mm)	56
Height (mm)	54
Optional Accessories	LID16949--
Necessary Accessories	LID13677--; LID16462--;
LxWxH mm	56x56x54
Cut-out size mm	Ø 49

Dimensioned drawing: 68004/AL/W ALUMINIUM RECESSED 3W WW DARK LIGHT IP54 350mA

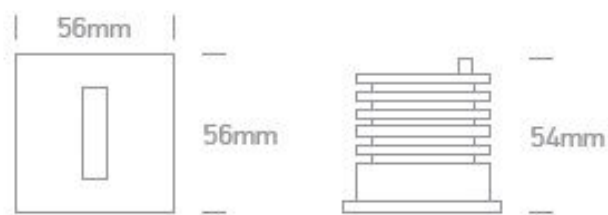

Article Table

DESCRIPTION	Order No.
68004/AL/W ALUMINIUM RECESSED 3W WW DARK LIGHT IP54 350mA recessed wall luminaire, without driver; 19 WALL REC & INGRND	LID14511
Necessary Accessories	
89004 DRIVER 350mA 1-4W IP66 230V 23 DRIVERS	LID13677
89004T DIMMABLE DRIVER 350mA 2-4W IP66 230V 23 DRIVERS	LID16462
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949