


Data Sheet for Article: LID14752--

11130BT/W/C WHITE COB 30W CW 700mA TRIMLESS ADJUSTABLE

requires 700mA driver; 07 DOWNLIGHT ADJ LED

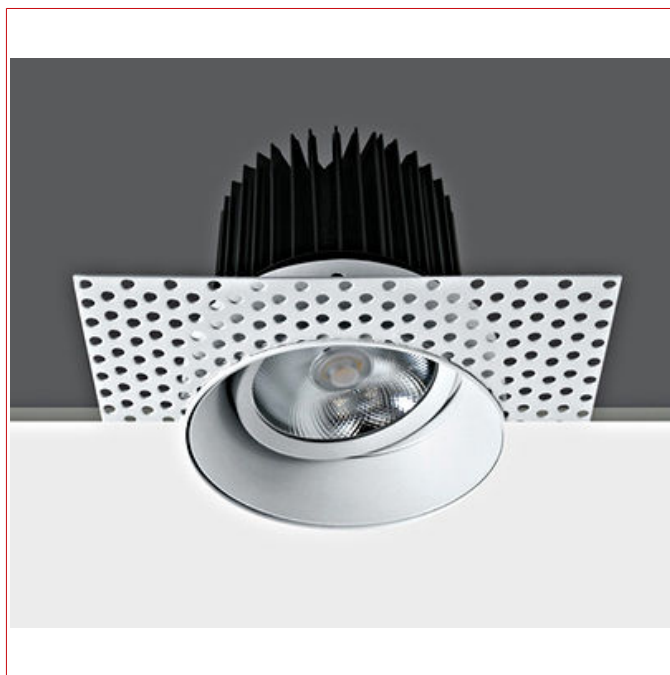

Product Details

30W COB Recessed adjustable Trimless LED spot, IP20. _x000D_ _x000D_ Requires 700mA driver._x000D_ _x000D_ Complies with standard EN60598-1 and any other specific standards.

Technical Data

Luminous flux (lm)	2200
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Dimmable	no
Protection class	III
IP Rating	IP20
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	38
Power (W)	30
Operation current mA (mA)	700
Mounting	recessed mounting ceiling

Technical Data - continued

Cut-out size (mm)	Ø 110
Mounting depth (mm)	160
Colour	White
Material	Aluminum
Length (mm)	150
Width (mm)	150
Height (mm)	125
Diameter (mm)	100
Optional Accessories	LID 16949--
LxWxH mm	150x150x125
ØxH mm	100x125
Cut-out size mm	Ø 110

Dimensioned drawing: 11130BT/W/C WHITE COB 30W CW 700mA TRIMLESS ADJUSTABLE



Article Table

DESCRIPTION	Order No.
11130BT/W/C WHITE COB 30W CW 700mA TRIMLESS ADJUSTABLE requires 700mA driver; 07 DOWNLIGHT ADJ LED	LID14752
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949