

Data Sheet for Article: LID15473--

Lano Q LED 40W, 3100lm, 3000K, UGR<17, 230V, IP20, white

Rescessed downlight, Complete with 1000mA driver




Technical Data

Luminous flux (lm)	3100
Light colour	warm white
Colour temperature (K)	3000
Glare factor (UGR)	<17
Protection class	II
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Power (W)	40
Operating voltage AC (V)	230
Mounting	recessed mounting ceiling pendant
Mounting depth (mm)	55
Colour	White
Material	Aluminum
Lenght (mm)	620

Technical Data - continued

Width (mm)	620
Height (mm)	10
Optional Accessories	LID13401--; LID16598--; LID15379--; LID16949--
LxWxH mm	620x620x10
Watt (W)	40

Dimensioned drawing: Lano Q LED 40W, 3100lm, 3000K, UGR<17, 230V, IP20, white

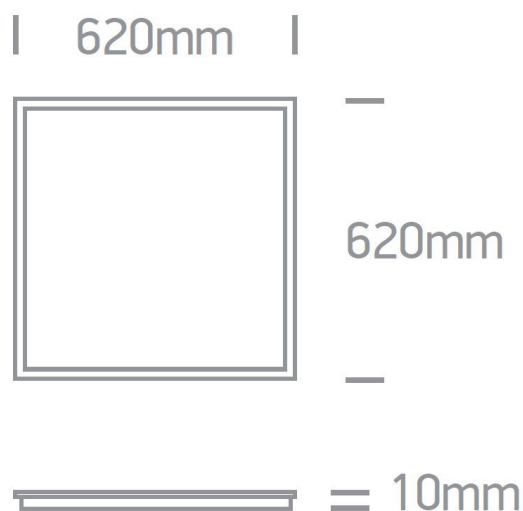

Article Table

DESCRIPTION	Order No.
Lano Q LED 40W, 3100lm, 3000K, UGR<17, 230V, IP20, white Rescued downlight, Complete with 1000mA driver	LID15473
Optional Accessories	
Suspension set for Lano, rope length 1000mm (2 piece for Lano 1200 x 600)	LID13401
LED driver 230V 8-50W 180mA dimmable	LID16598
3-way connection box, IP20, Quick Fix	LID15379
Through-hole quick-connector 32A, 2x L-N-PE	LID16949