


Data Sheet for Article: LID15661--

Katka 9 LED 9W 765lm 840 IP20 220-240V 100° black

Recessed ceiling luminaire

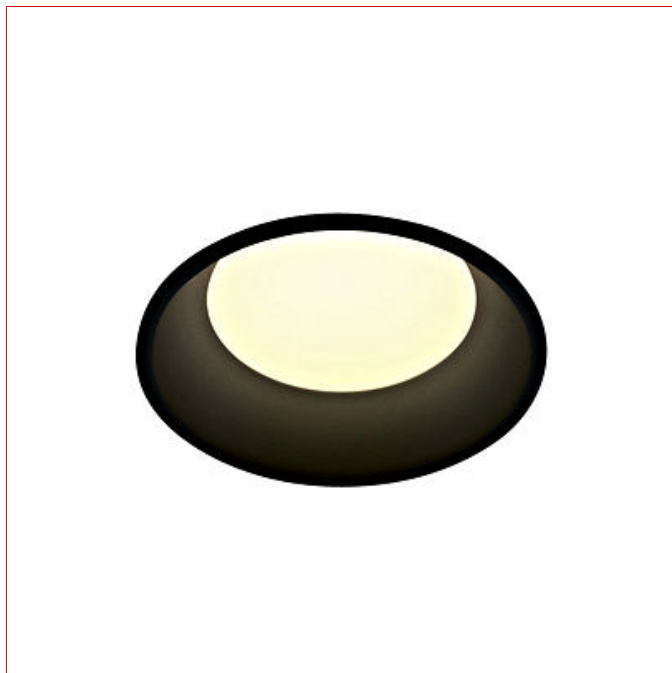

Technical Data

Luminous flux (lm)	765
Light colour	cool white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥90
Dimmable	no
Protection class	II
IP Rating	IP20
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	100
Power of system (W)	85
System efficiency (lm/W)	85
Power Factor	0,9
Power (W)	9
Controller	LED driver
Operating voltage AC (V)	220-240
Operation current mA (mA)	300

Technical Data - continued

Frequency (Hz)	50/60
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø110
Mounting depth (mm)	70
Colour	Black
Material	Die-cast aluminum
Height (mm)	50
Diameter (mm)	120
Optional Accessories	LID16949--
ØxH mm	120x50
Cut-out size mm	Ø110

Article Table

DESCRIPTION	Order No.
Katka 9 LED 9W 765lm 840 IP20 220-240V 100° black Recessed ceiling luminaire	LID15661
Optional Accessories	
Through-hole quick-connector 32A, 2x L-N-PE	LID16949